





Certificazioni / Certifications

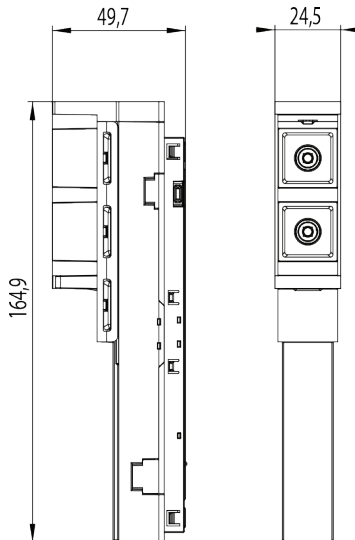

Info tecniche / Info tecniche

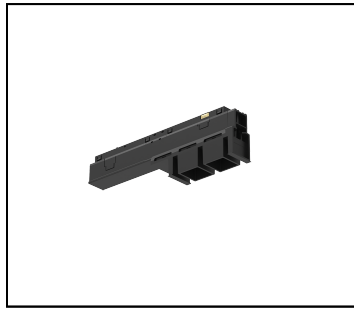

Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 257.2

Nominal Flux(lm) 429.4

Real Power(W) 5.3

Efficiency(lm / W) 48.5

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.5
	UGR axial:	9.8

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.7

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

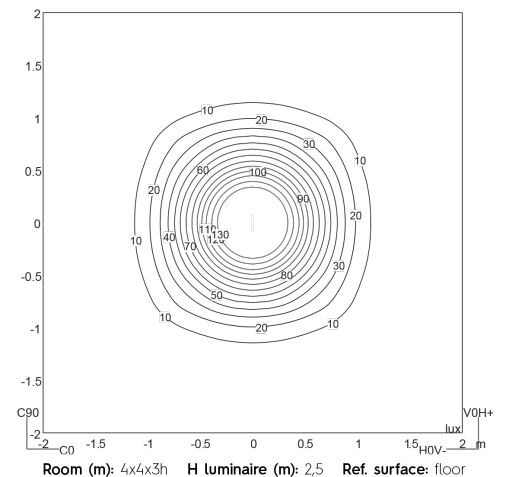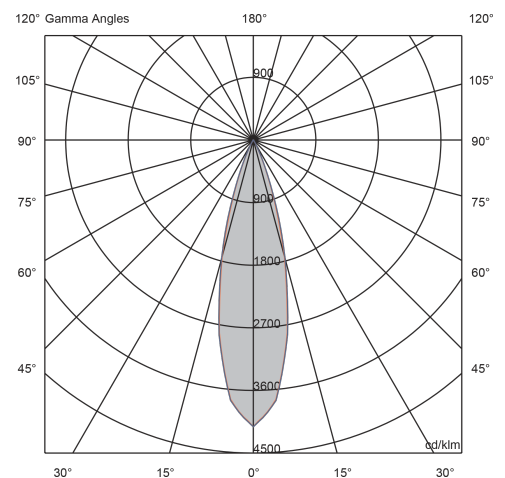

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

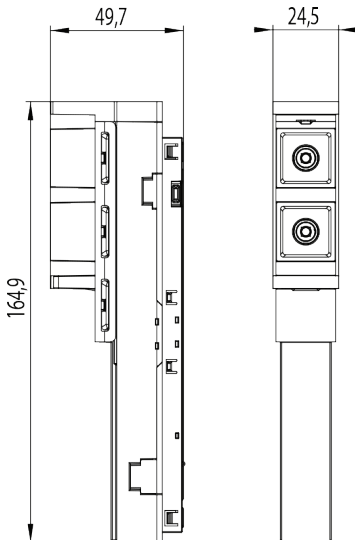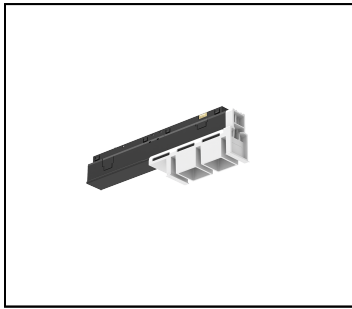

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 290.8

Nominal Flux(lm) 429.4

Real Power(W) 5.3

Efficiency(lm / W) 54.8

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.1
	UGR axial:	20.2

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.7

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

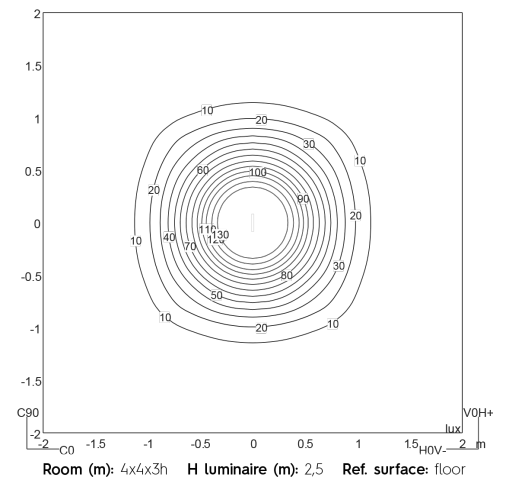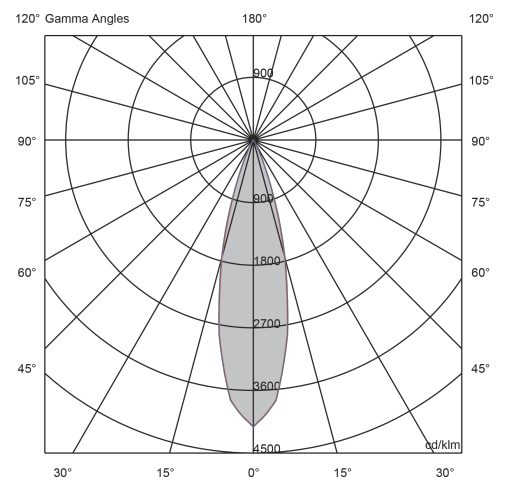


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

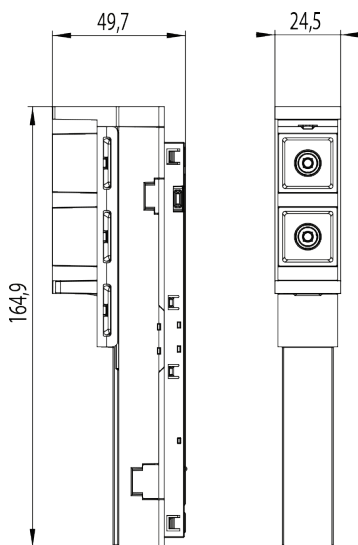

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 216.6

Nominal Flux(lm) 644.9

Real Power(W) 5.3

Efficiency(lm / W) 40.8

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	12.9
	UGR axial:	14.1

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.7

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

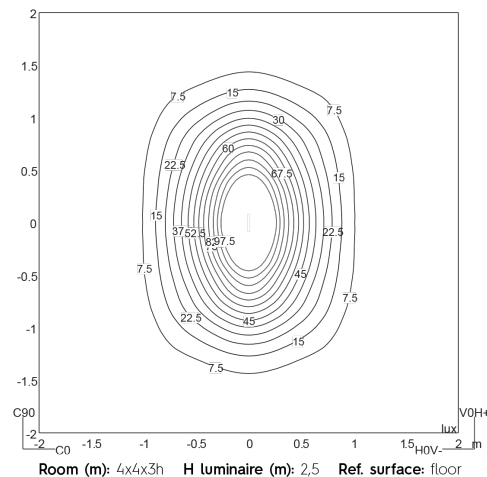
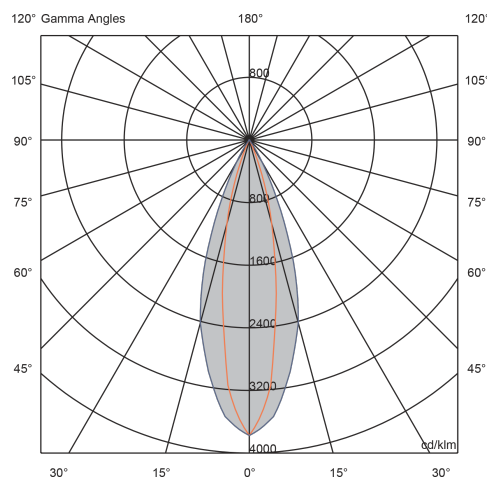


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

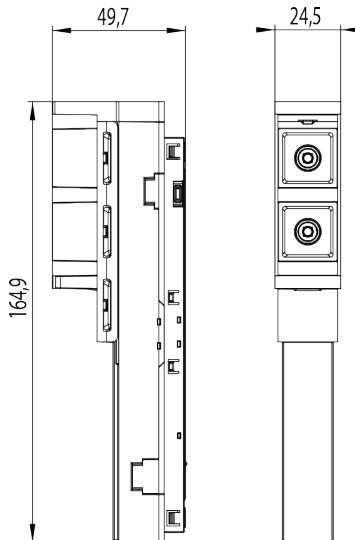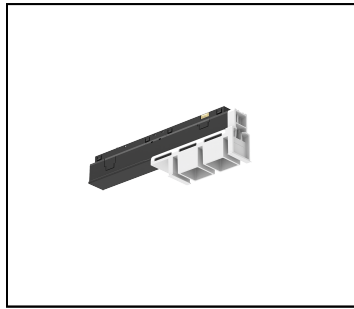

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 245.3

Nominal Flux(lm) 644.9

Real Power(W) 5.3

Efficiency(lm / W) 46.2

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.4
	UGR axial:	23.2

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.7

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

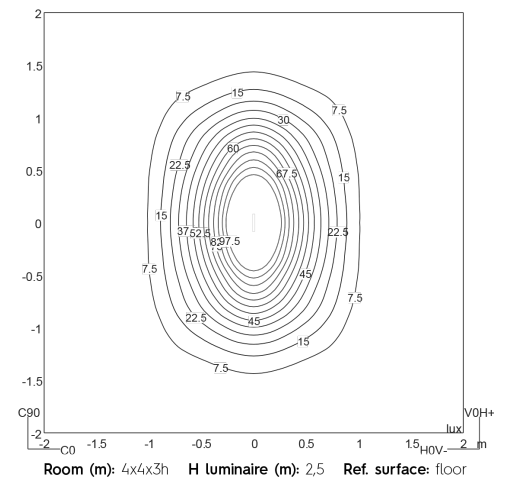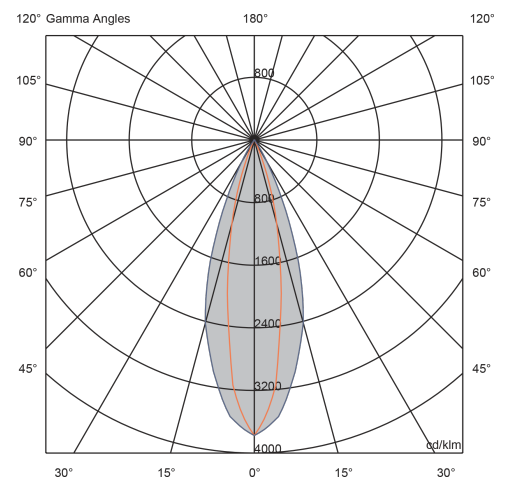


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

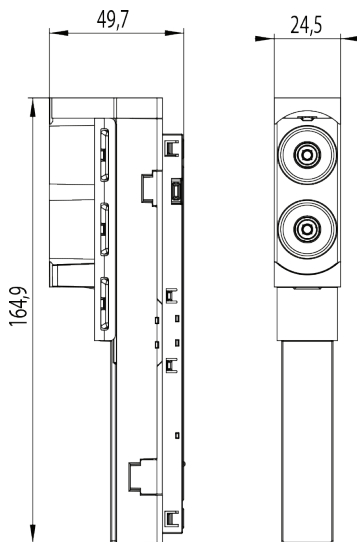

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 244.4

Nominal Flux(lm) 429.4

Real Power(W) 5.3

Efficiency(lm / W) 46.1

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.1
	UGR axial:	9.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

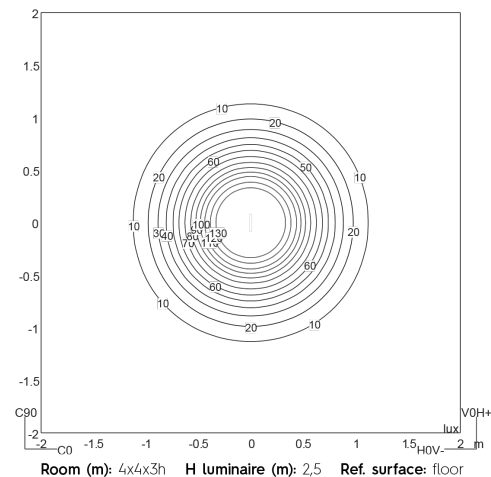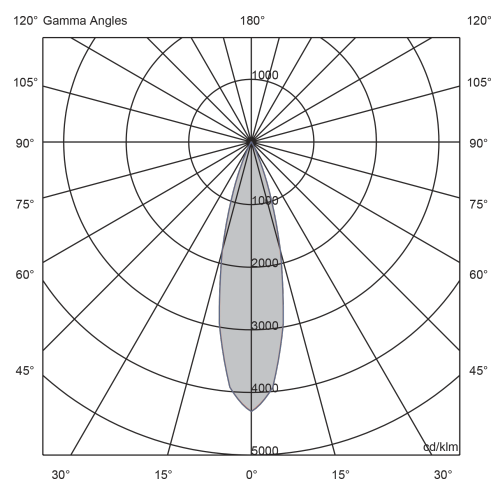

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

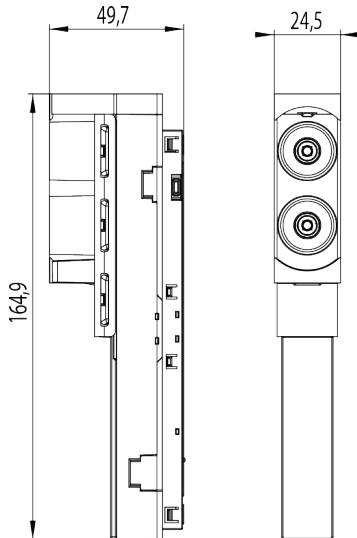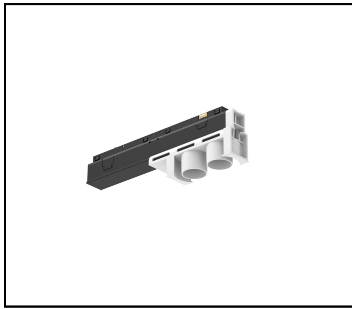

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 282.8

Nominal Flux(lm) 429.4

Real Power(W) 5.3

Efficiency(lm / W) 53.3

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.7
	UGR axial:	20.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

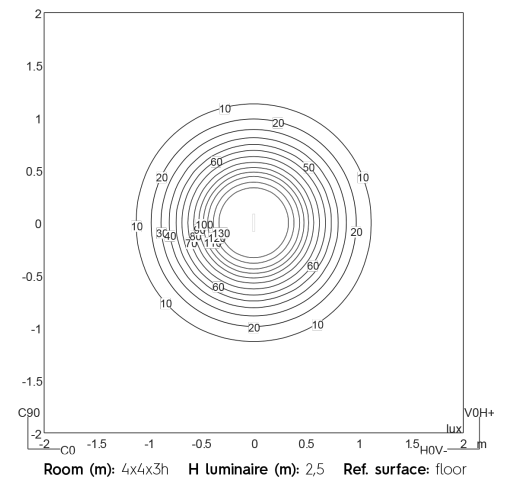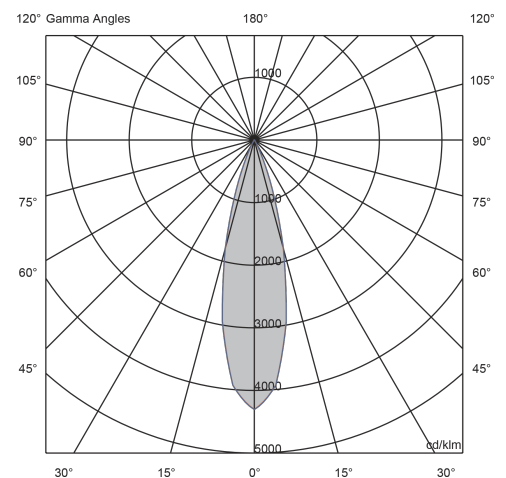


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

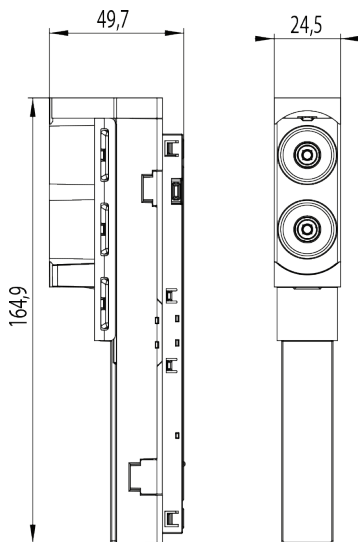

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 205.9

Nominal Flux(lm) 644.9

Real Power(W) 5.3

Efficiency(lm / W) 38.8

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.7
	UGR axial:	14.2

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

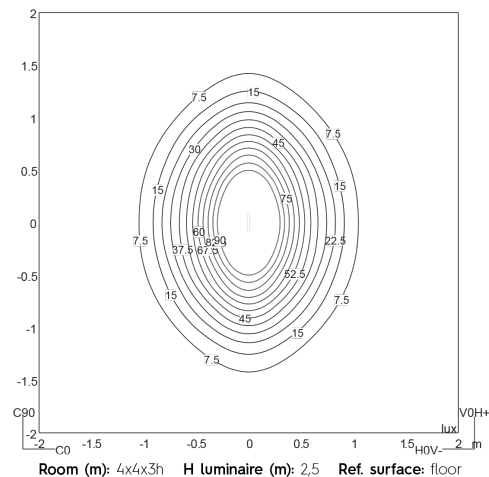
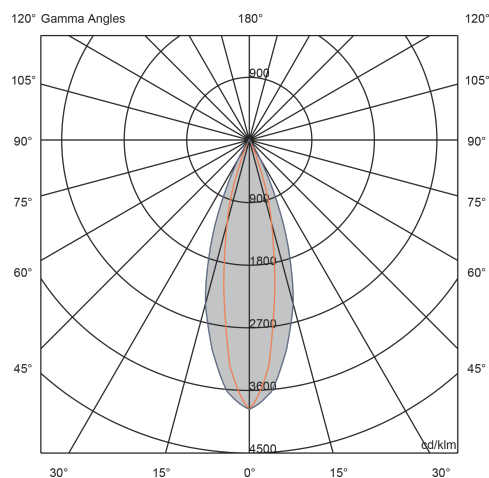


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

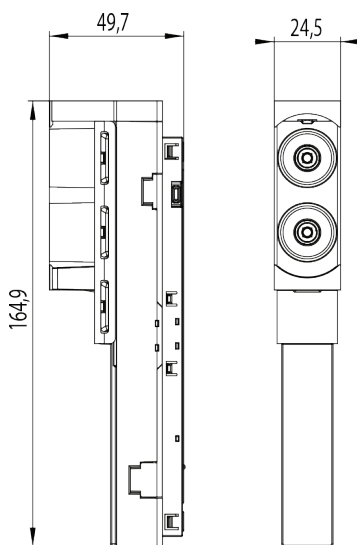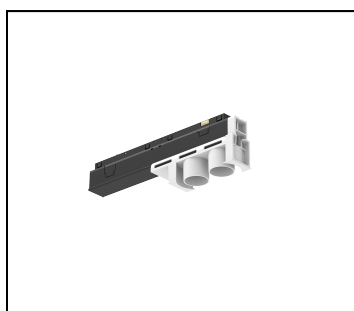

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 238.5

Nominal Flux(lm) 644.9

Real Power(W) 5.3

Efficiency(lm / W) 45.0

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.5
	UGR axial:	23.5

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

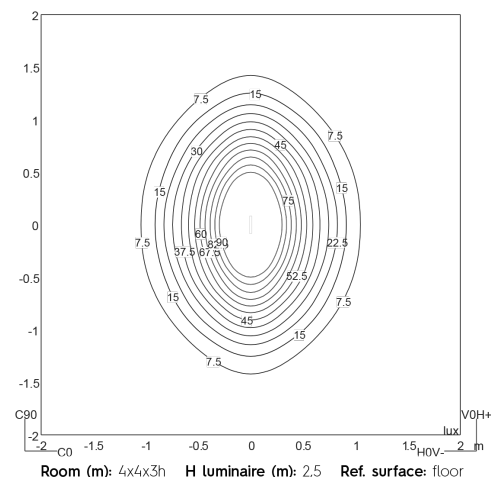
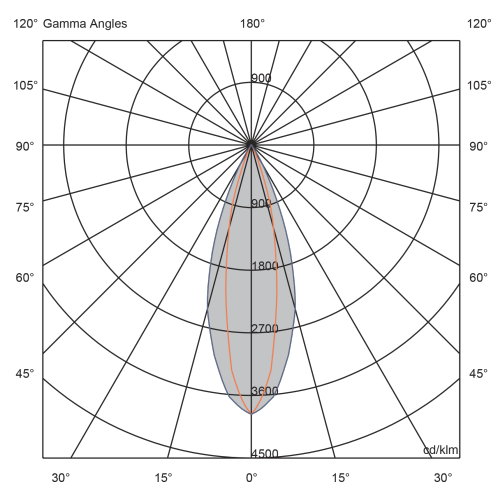


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

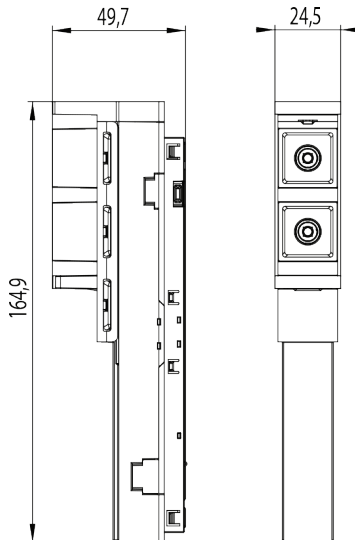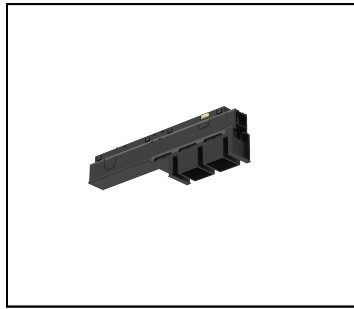

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 248.8

Nominal Flux(lm) 415.9

Real Power(W) 5.3

Efficiency(lm / W) 46.9

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.8
	UGR axial:	9.6

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

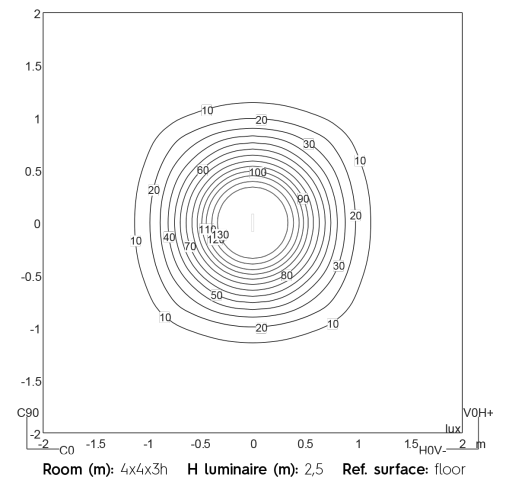
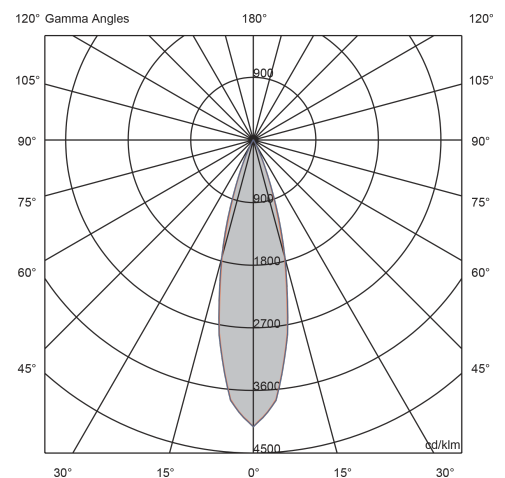


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

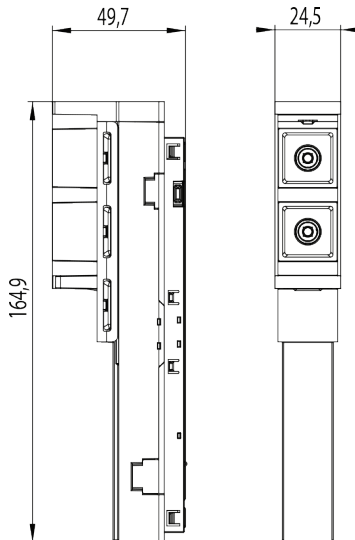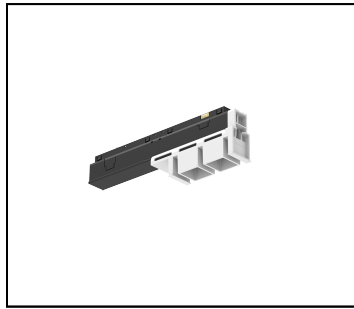

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 281.3

Nominal Flux(lm) 415.9

Real Power(W) 5.3

Efficiency(lm / W) 53.0

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	19.8
	UGR axial:	20.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

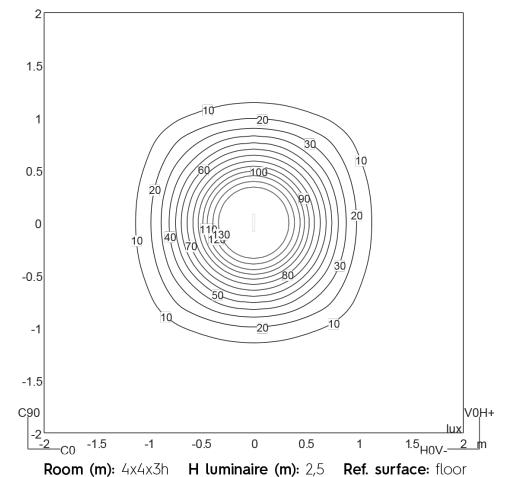
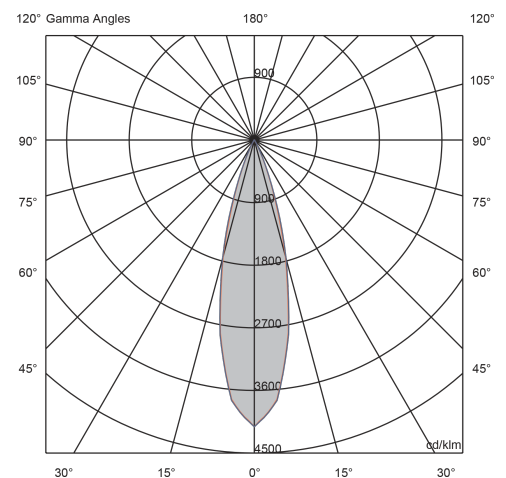


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

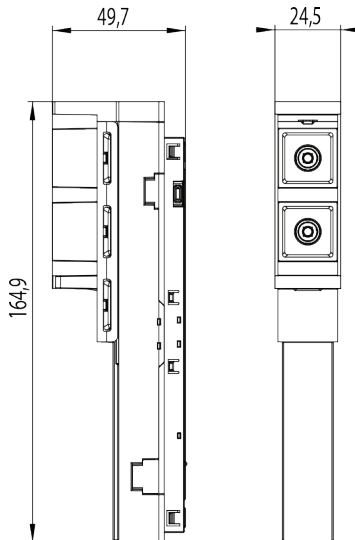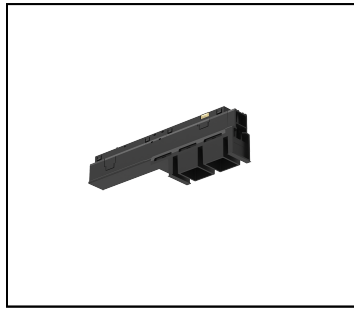

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 209.6

Nominal Flux(lm) 623.9

Real Power(W) 5.3

Efficiency(lm / W) 39.5

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	12.8
	UGR axial:	14.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

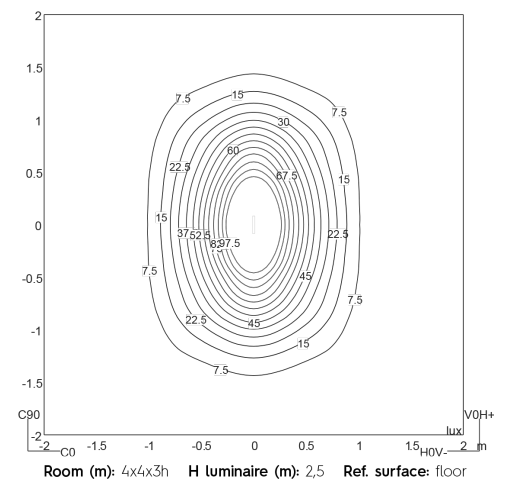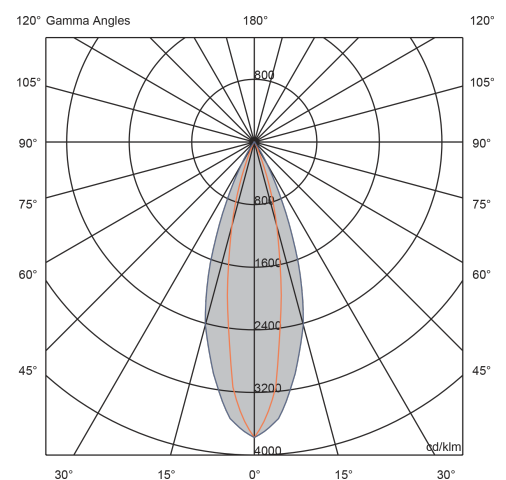

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

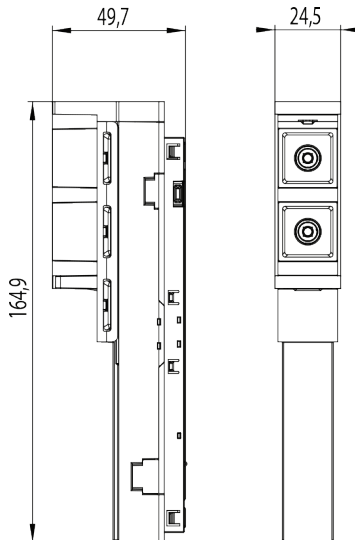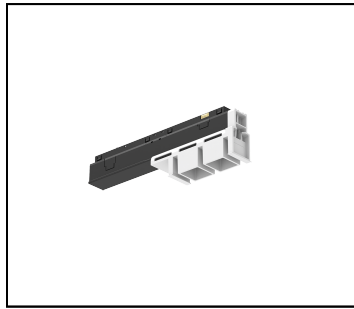

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 237.5

Nominal Flux(lm) 623.9

Real Power(W) 5.3

Efficiency(lm / W) 44.8

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.3
	UGR axial:	23.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

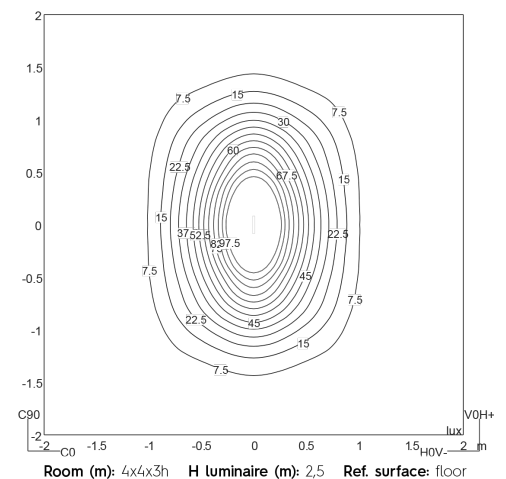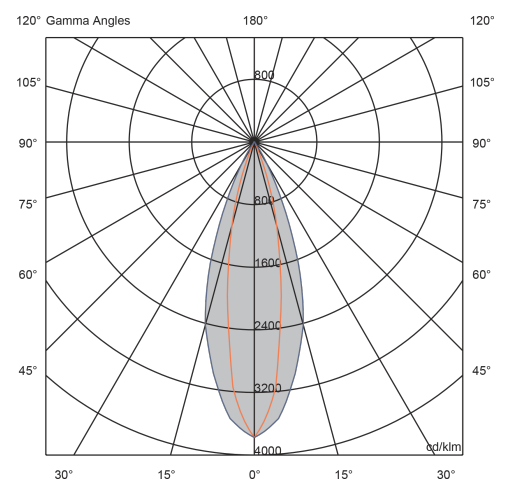


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

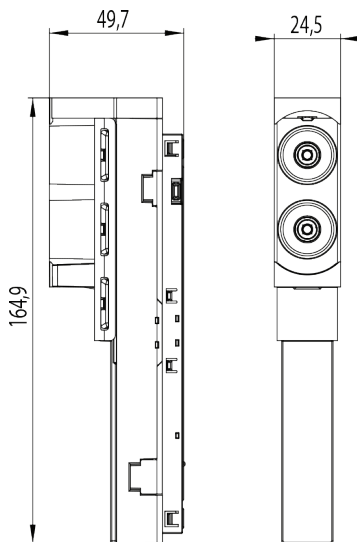

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 236.4

Nominal Flux(lm) 415.9

Real Power(W) 5.3

Efficiency(lm / W) 44.6

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.0
	UGR axial:	9.2

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

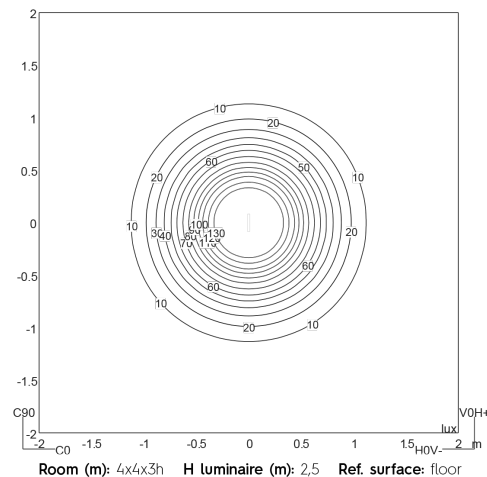
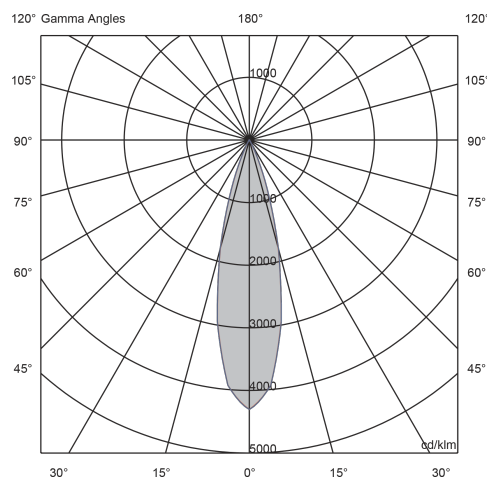


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

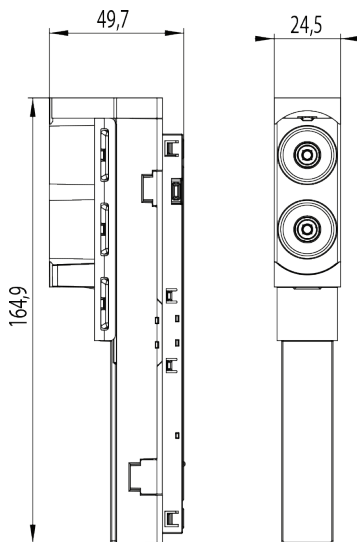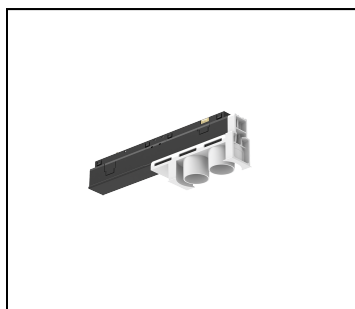

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.
Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.
A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 273.6

Nominal Flux(lm) 415.9

Real Power(W) 5.3

Efficiency(lm / W) 51.6

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.9
	UGR axial:	20.3

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

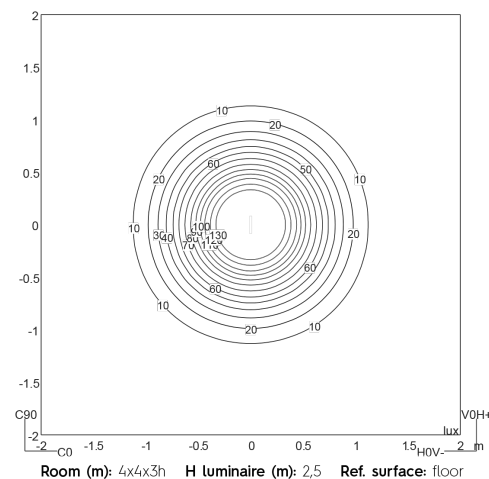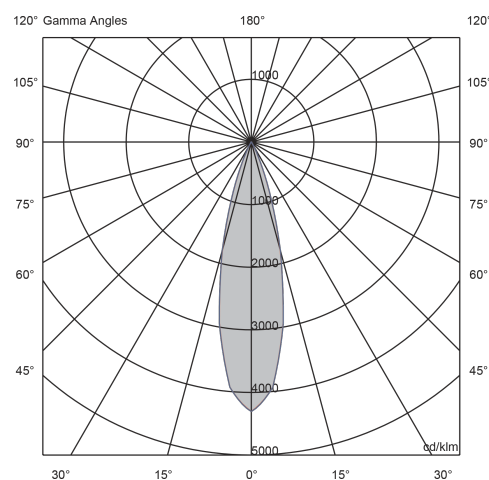


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

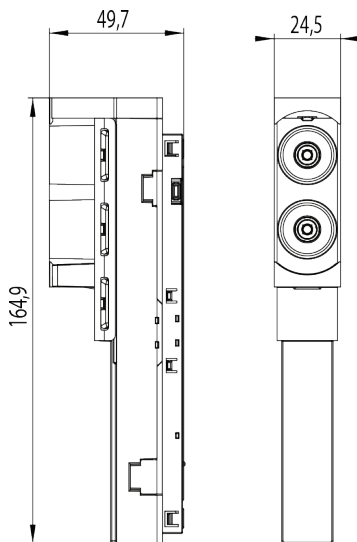

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 199.2

Nominal Flux(lm) 623.9

Real Power(W) 5.3

Efficiency(lm / W) 37.5

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.7
	UGR axial:	14.2

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

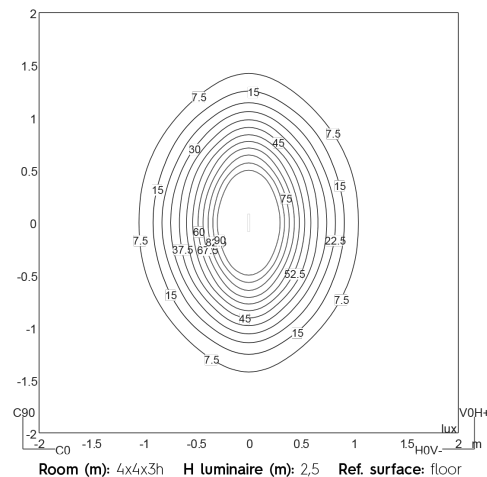
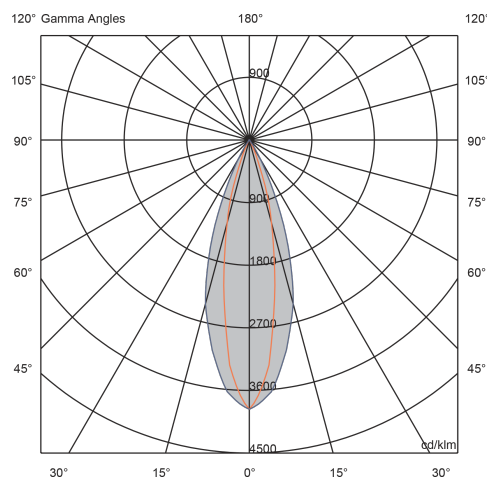


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

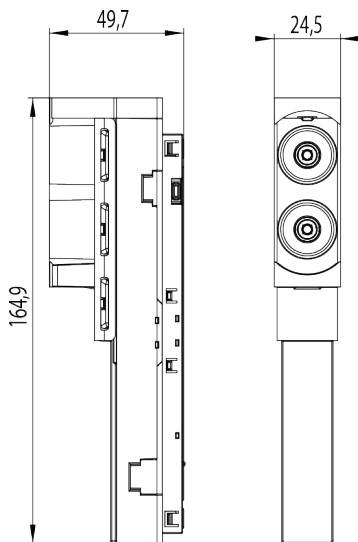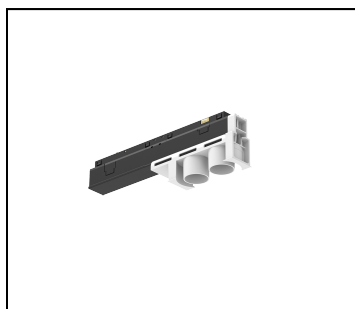

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 230.7

Nominal Flux(lm) 623.9

Real Power(W) 5.3

Efficiency(lm / W) 43.5

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.4
	UGR axial:	23.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

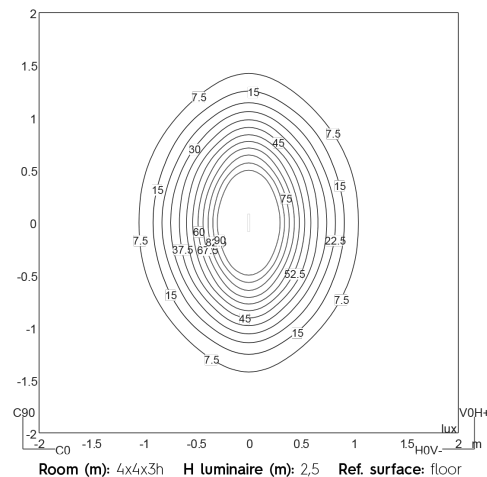
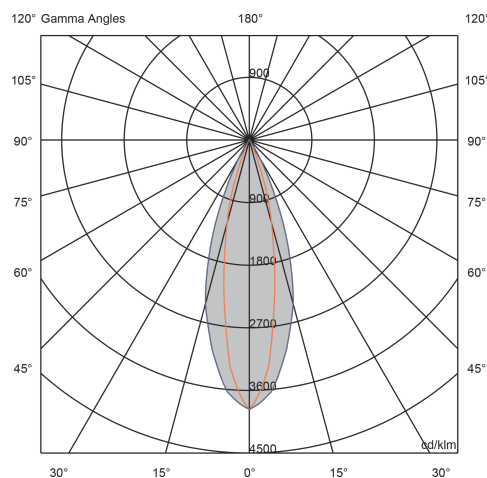


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

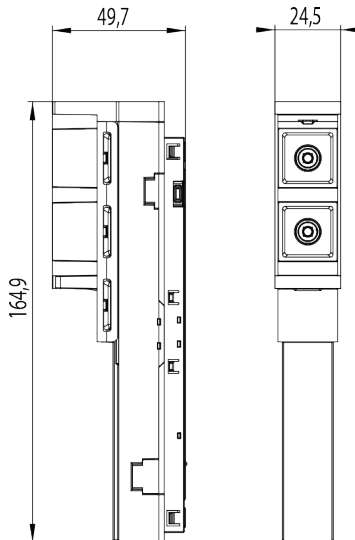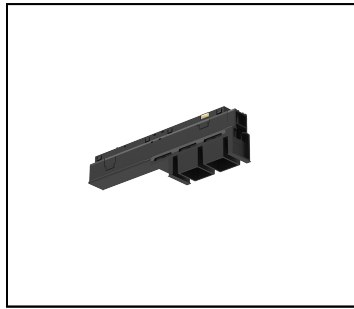

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 279.2

Nominal Flux(lm) 466.6

Real Power(W) 5.3

Efficiency(lm / W) 52.6

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.7
	UGR axial:	10.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

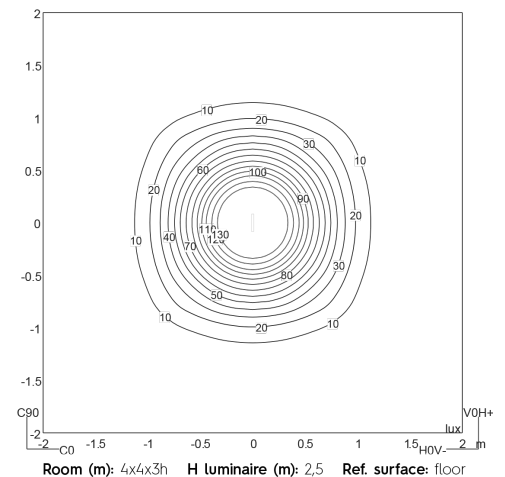
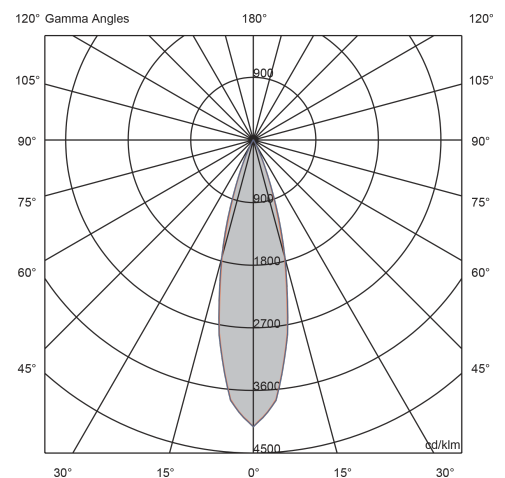


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

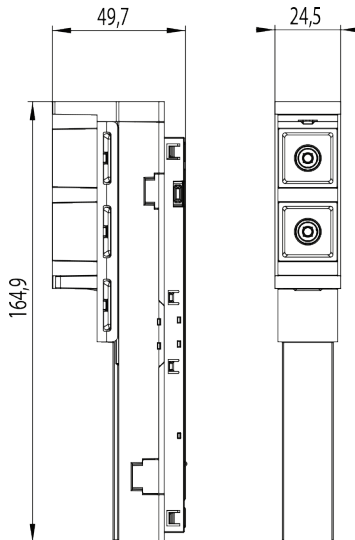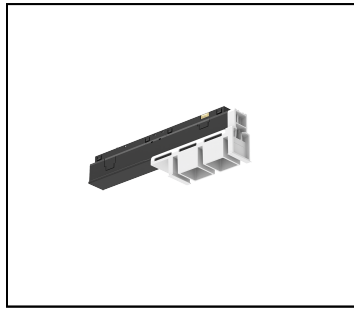

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 315.6

Nominal Flux(lm) 466.6

Real Power(W) 5.3

Efficiency(lm / W) 59.5

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.2
	UGR axial:	20.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

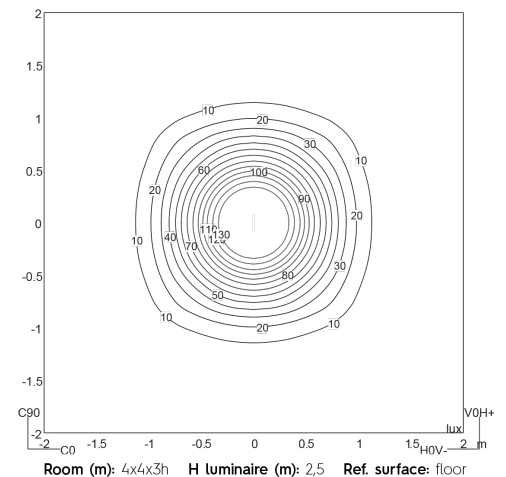
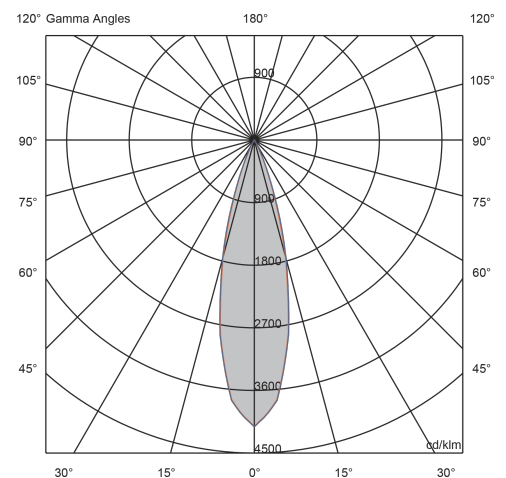


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

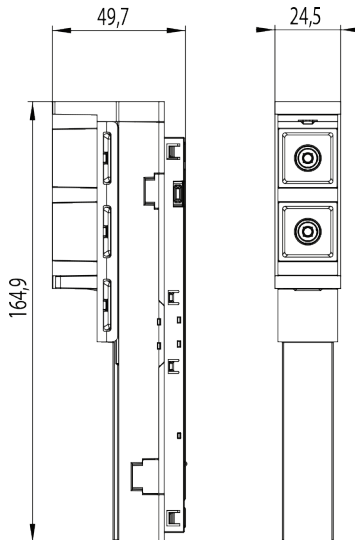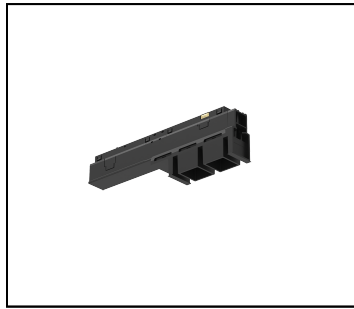

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/B6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 235.1

Nominal Flux(lm) 699.9

Real Power(W) 5.3

Efficiency(lm / W) 44.3

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.2
	UGR axial:	14.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

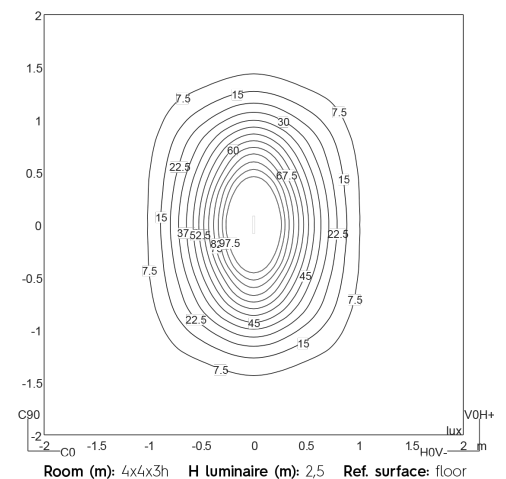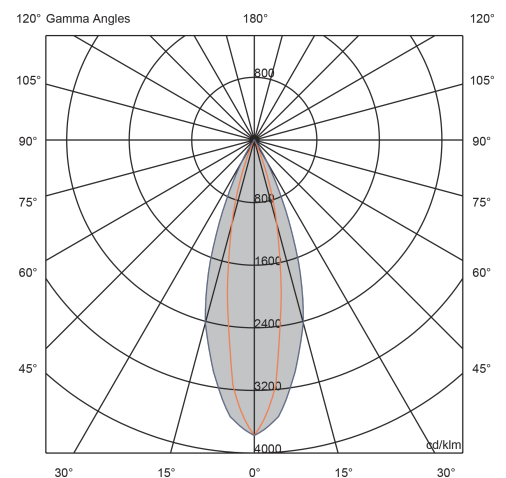

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

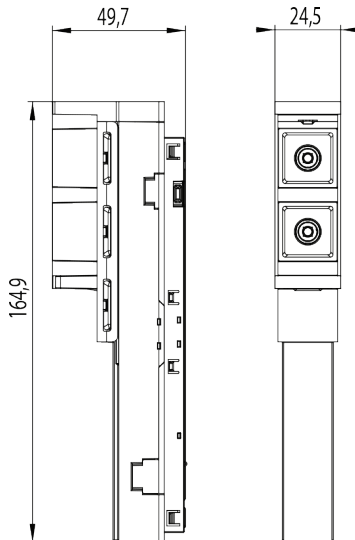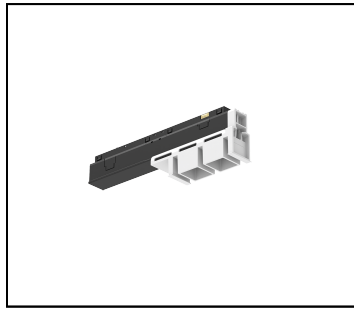

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS2/W6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 266.2

Nominal Flux(lm) 699.9

Real Power(W) 5.3

Efficiency(lm / W) 50.2

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.7
	UGR axial:	23.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 70.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

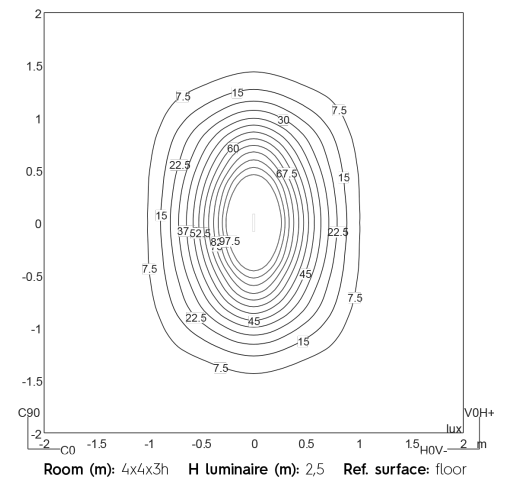
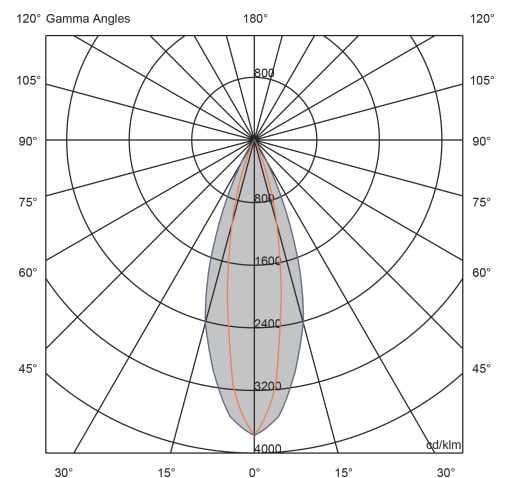


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

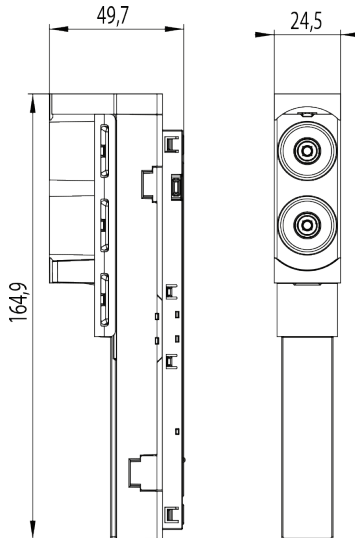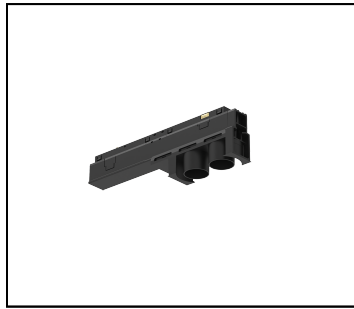

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 265.2

Nominal Flux(lm) 466.6

Real Power(W) 5.3

Efficiency(lm / W) 50.0

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.4
	UGR axial:	9.6

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

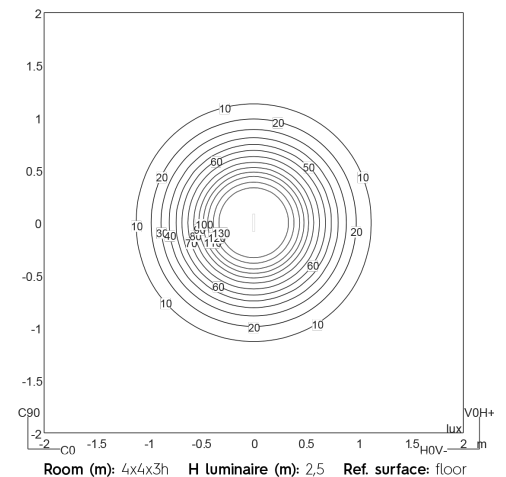
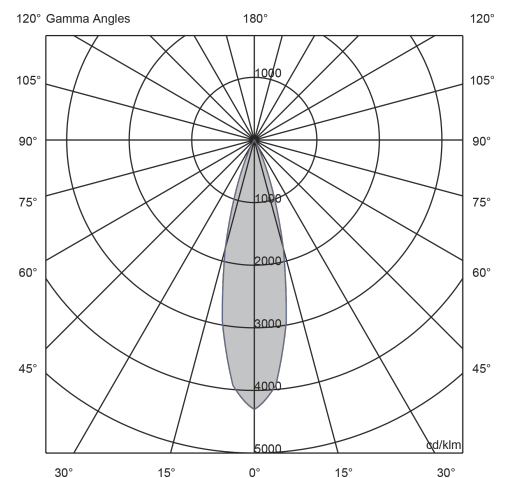


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

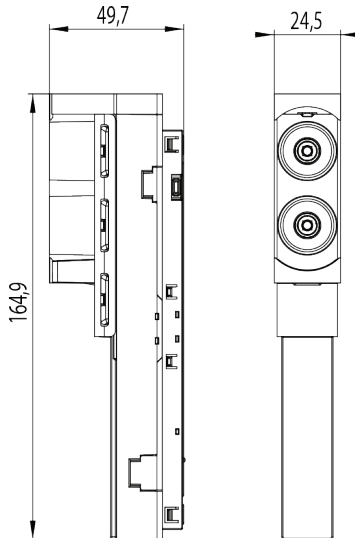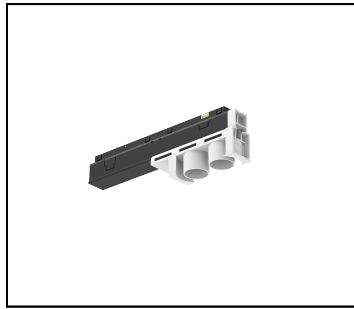

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 306.9

Nominal Flux(lm) 466.6

Real Power(W) 5.3

Efficiency(lm / W) 57.9

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.0
	UGR axial:	20.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

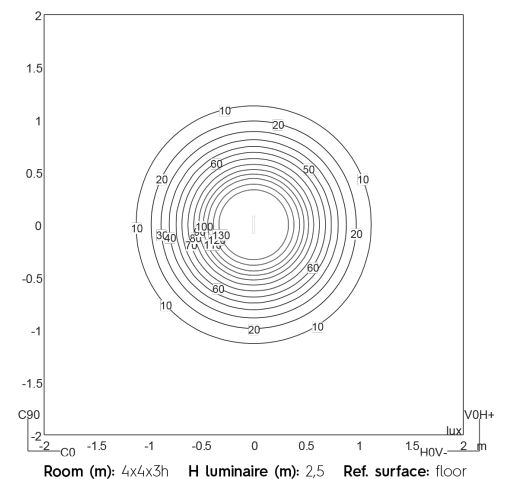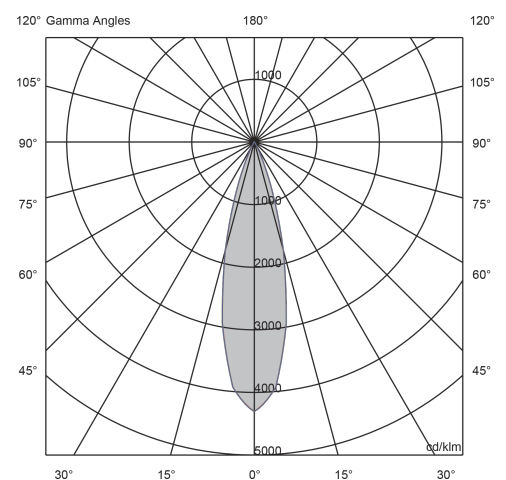


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

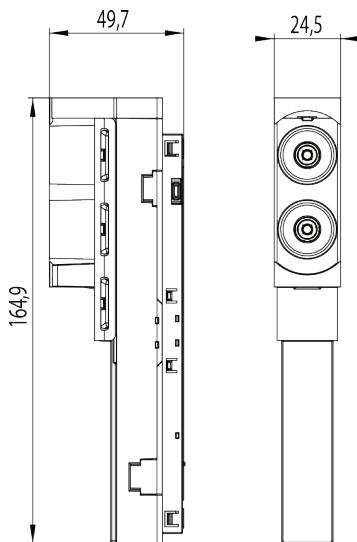

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/B6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 223.5

Nominal Flux(lm) 699.9

Real Power(W) 5.3

Efficiency(lm / W) 42.1

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	14.0
	UGR axial:	14.5

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

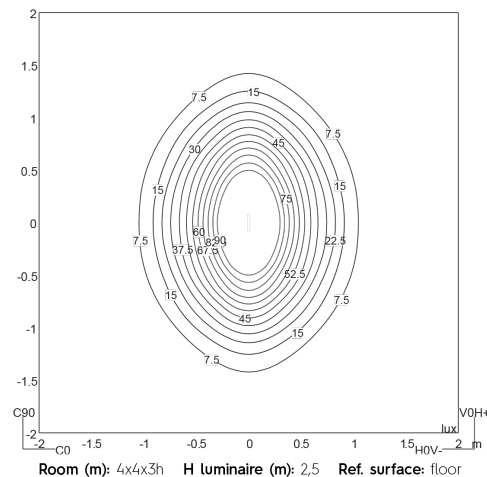
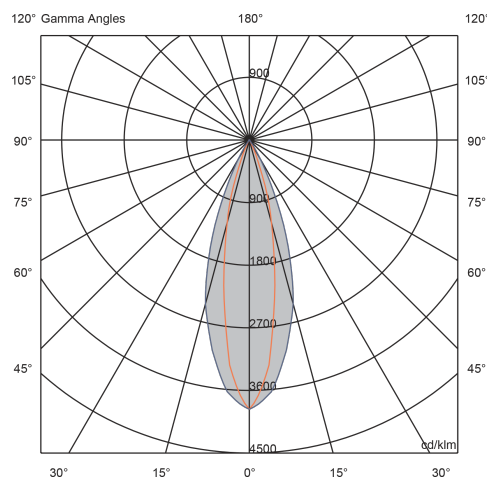


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

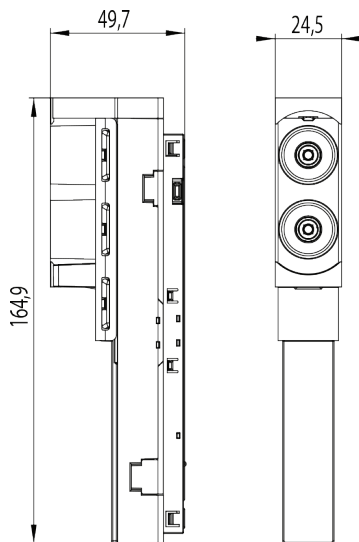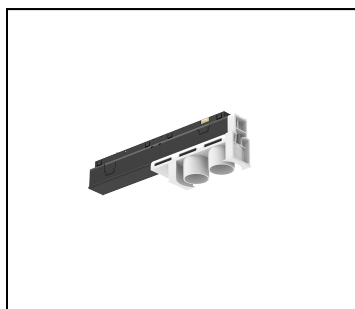

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR2/W6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Due antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Two round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 258.8

Nominal Flux(lm) 699.9

Real Power(W) 5.3

Efficiency(lm / W) 48.8

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.8
	UGR axial:	23.8

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 6

I LED(mA) 640

L(mm) 165



Weight(g) 68.4

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

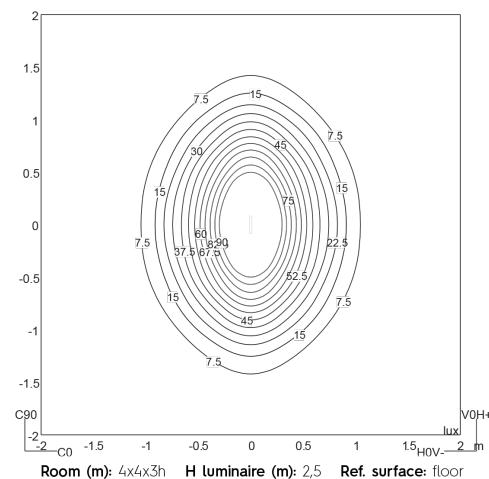
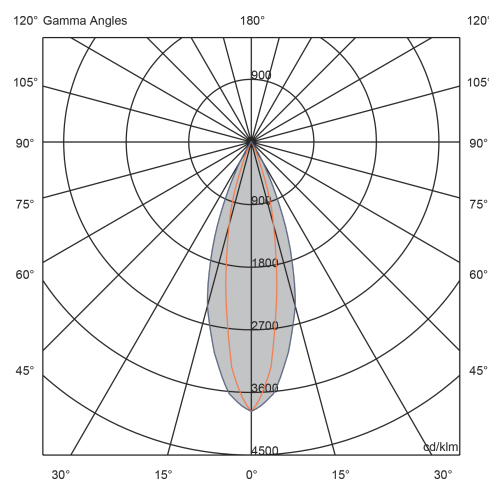


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

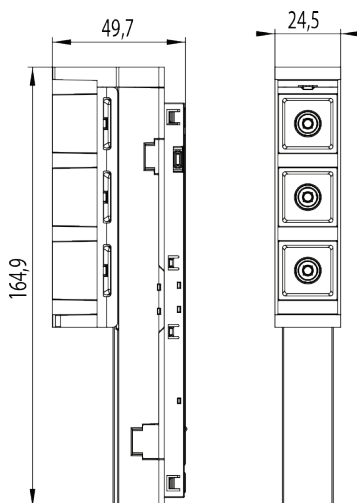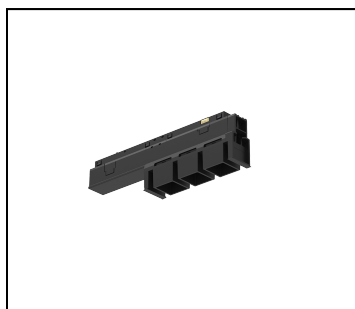

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 367.4

Nominal Flux(lm) 429.4

Real Power(W) 7.1

Efficiency(lm / W) 51.7

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.1
	UGR axial:	9.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

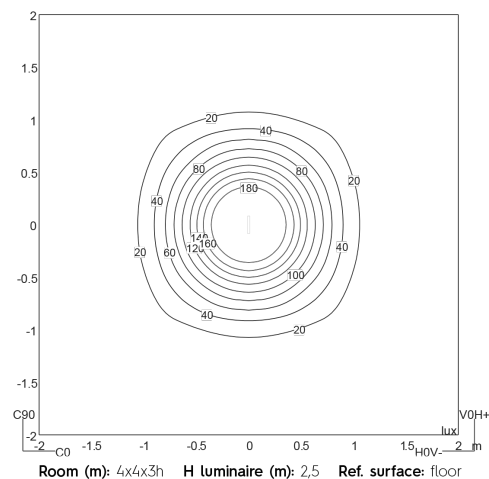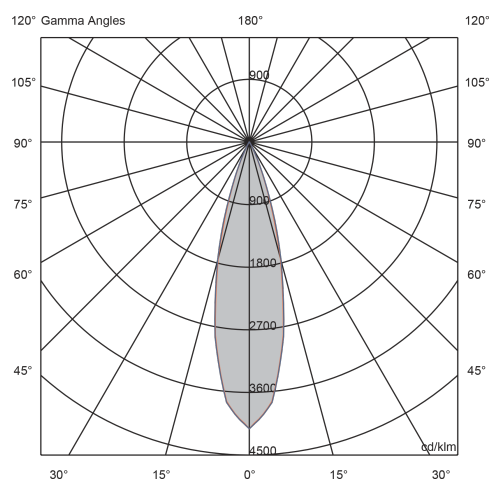

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

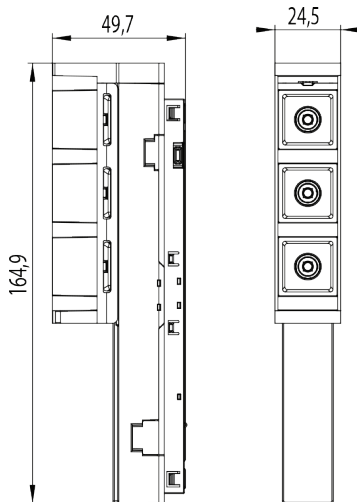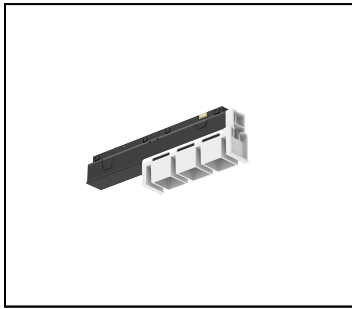

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 415.5

Nominal Flux(lm) 429.4

Real Power(W) 7.1

Efficiency(lm / W) 58.5

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	19.5
	UGR axial:	19.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

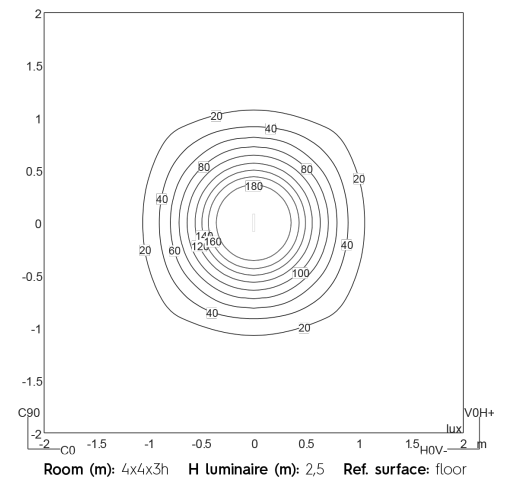
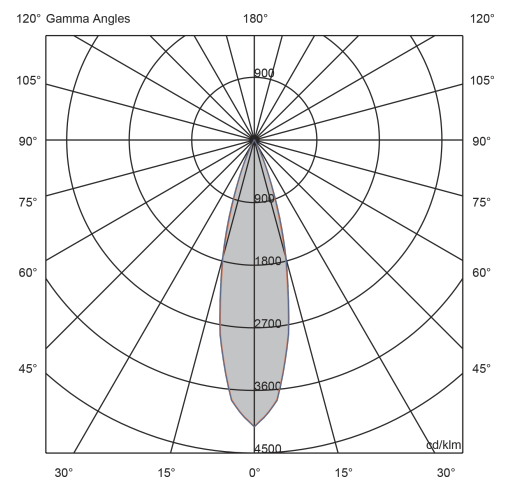


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

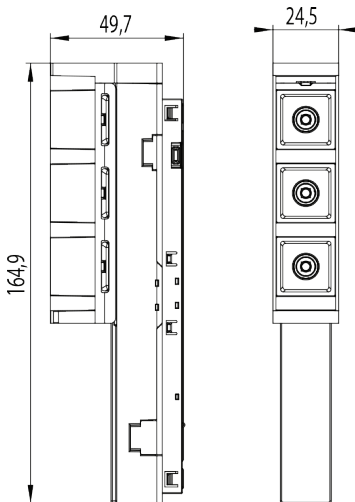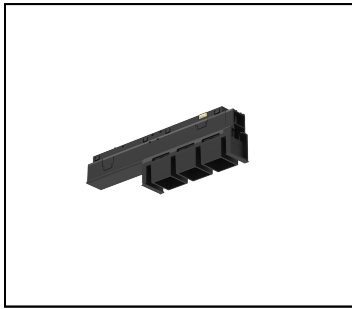

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 309.5

Nominal Flux(lm) 644.9

Real Power(W) 7.1

Efficiency(lm / W) 43.5

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	12.5
	UGR axial:	13.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

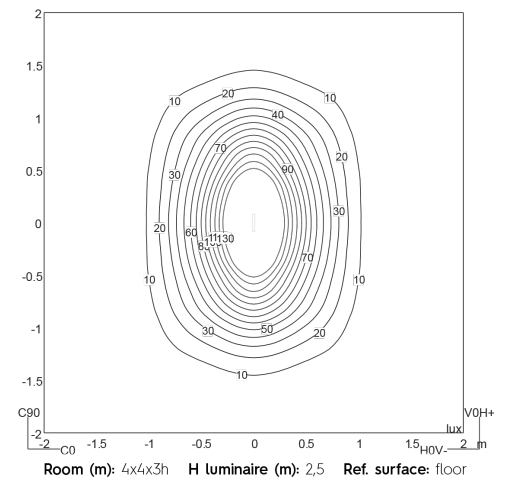
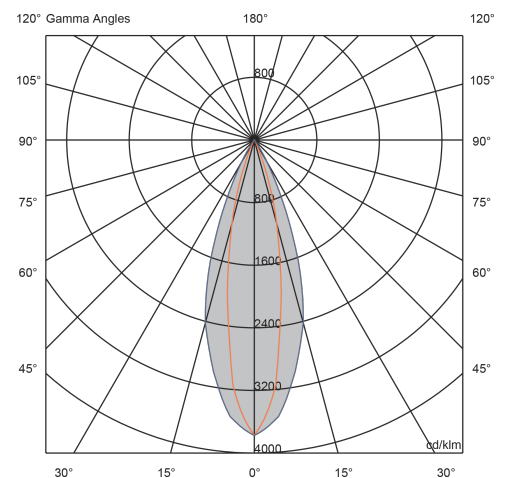


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

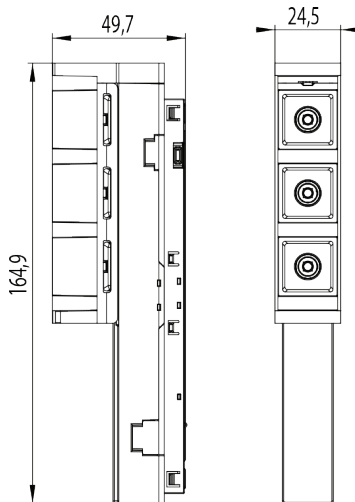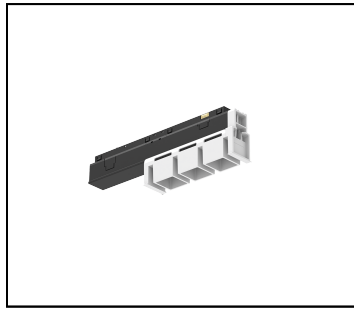

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 350.4

Nominal Flux(lm) 644.9

Real Power(W) 7.1

Efficiency(lm / W) 49.3

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.1
	UGR axial:	22.8

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

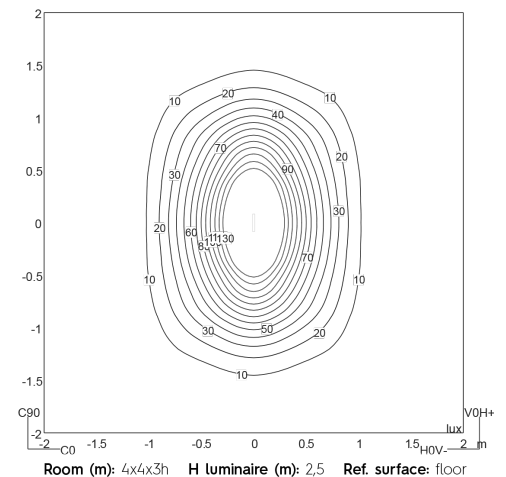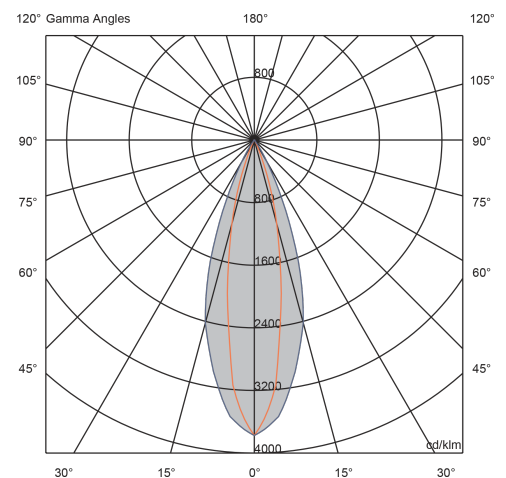


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

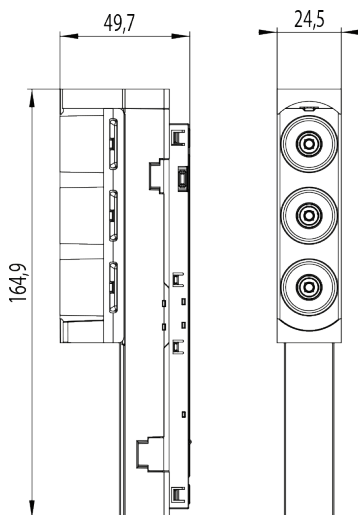

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 349.1

Nominal Flux(lm) 429.4

Real Power(W) 7.1

Efficiency(lm / W) 49.1

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	8.8
	UGR axial:	9.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

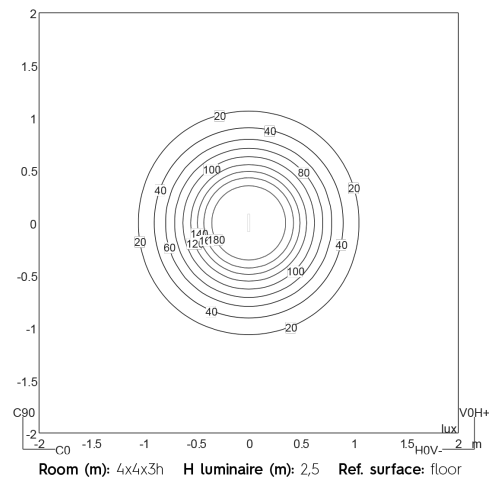
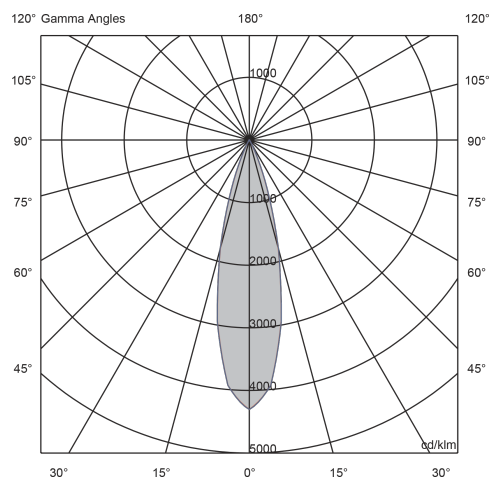


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

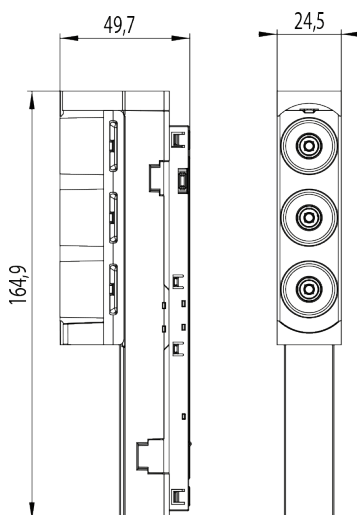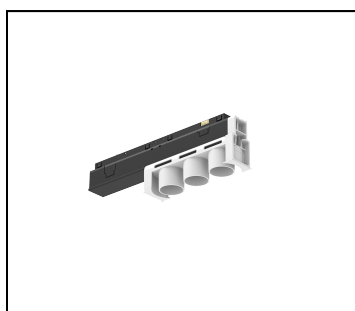

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W5-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 404

Nominal Flux(lm) 429.4

Real Power(W) 7.1

Efficiency(lm / W) 56.9

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.3
	UGR axial:	20.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

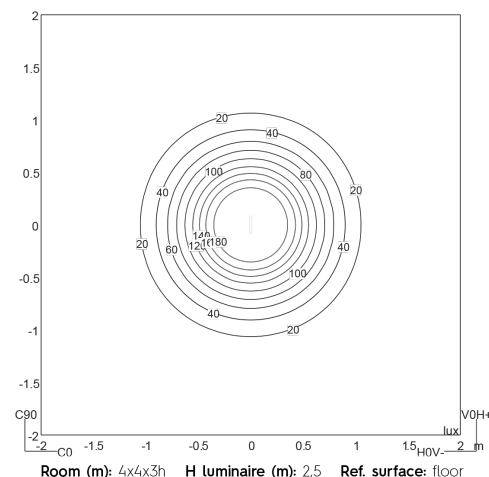
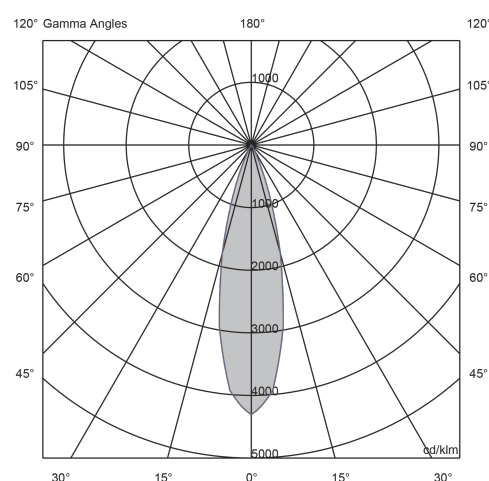


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

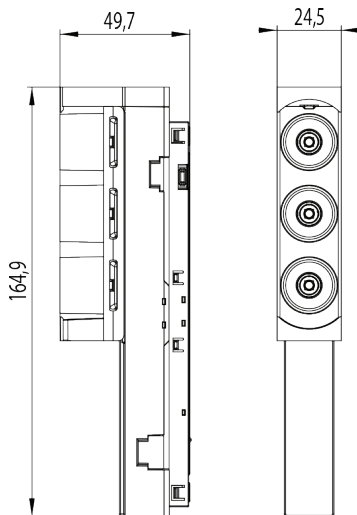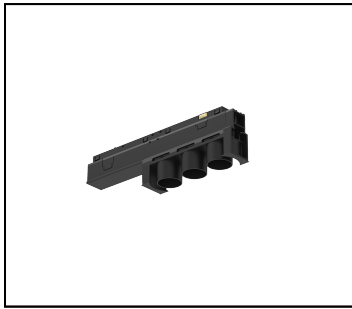

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 294.2

Nominal Flux(lm) 644.9

Real Power(W) 7.1

Efficiency(lm / W) 41.4

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.3
	UGR axial:	13.8

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

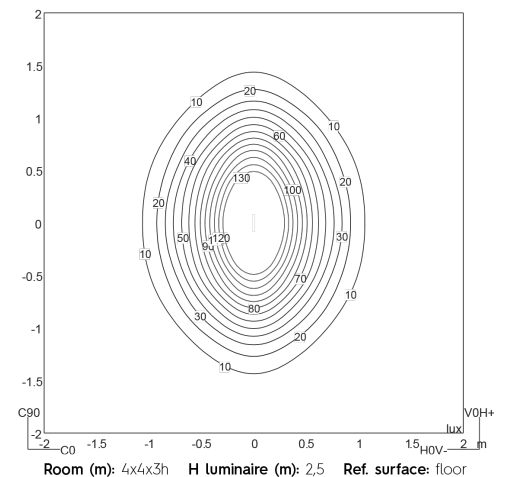
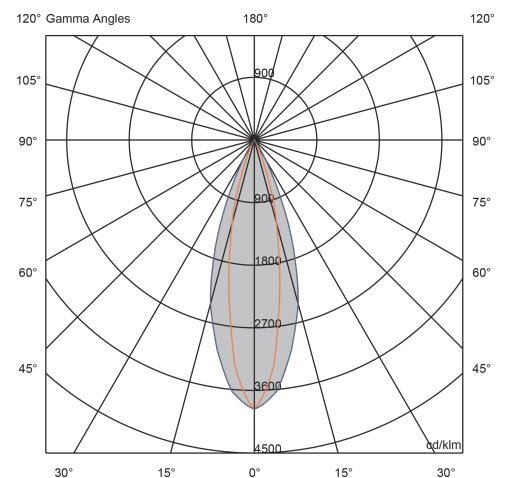


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

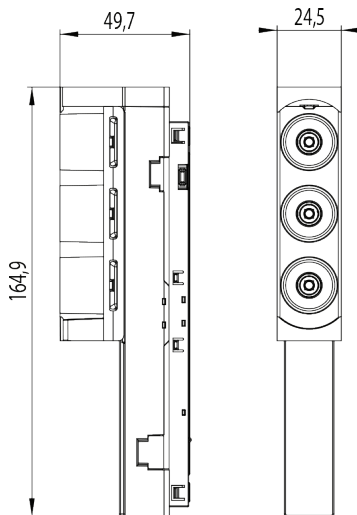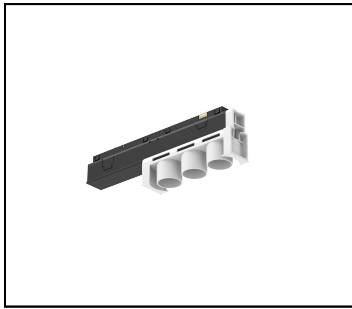

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W5-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 3000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 3000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 340.7

Nominal Flux(lm) 644.9

Real Power(W) 7.1

Efficiency(lm / W) 47.9

LED source LED

Colour Temperature(K) 3000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.1
	UGR axial:	23.1

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

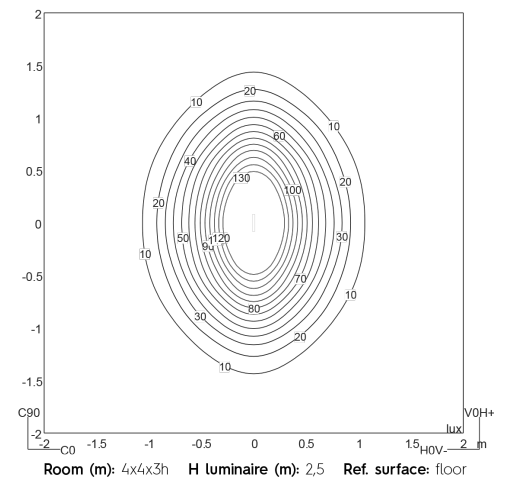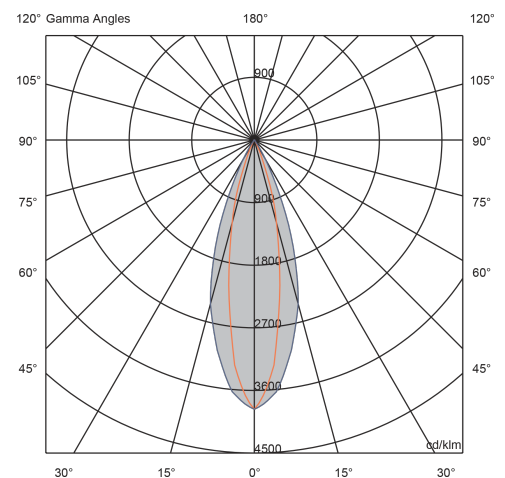

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

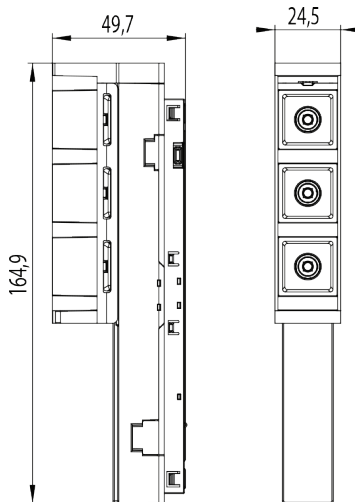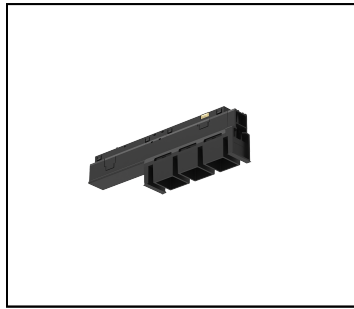

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 355.5

Nominal Flux(lm) 415.9

Real Power(W) 7.1

Efficiency(lm / W) 50.0

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.0
	UGR axial:	9.3

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

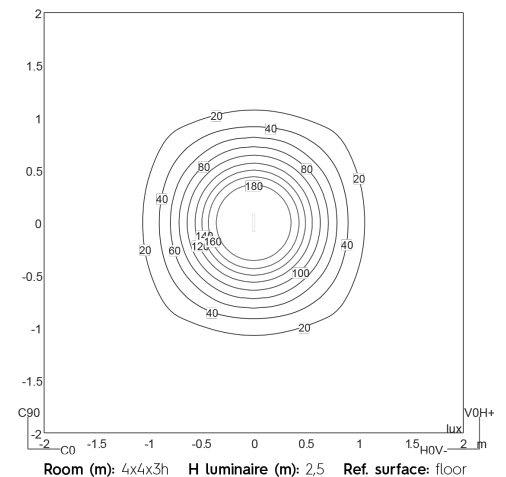
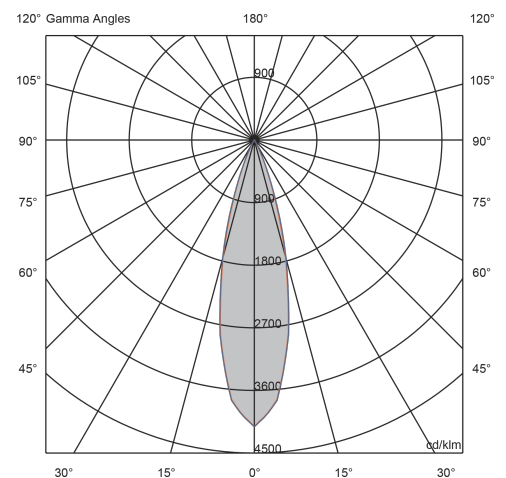


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

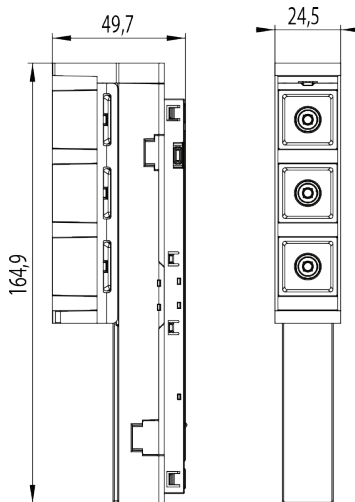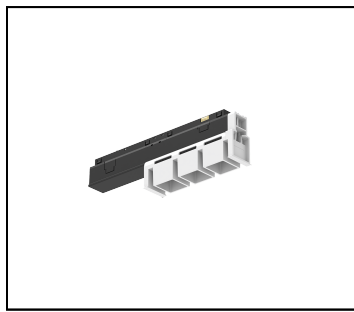

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 401.9

Nominal Flux(lm) 415.9

Real Power(W) 7.1

Efficiency(lm / W) 56.6

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	19.7
	UGR axial:	19.6

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

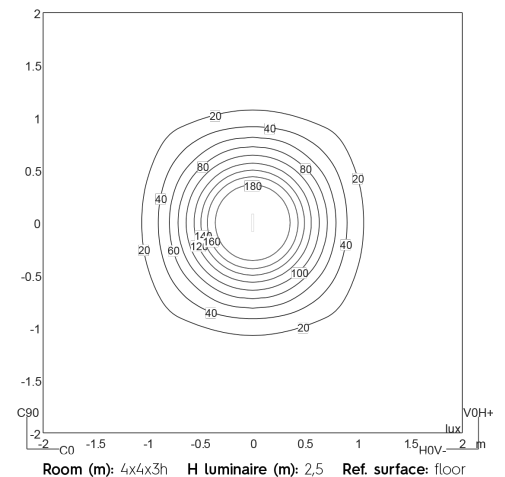
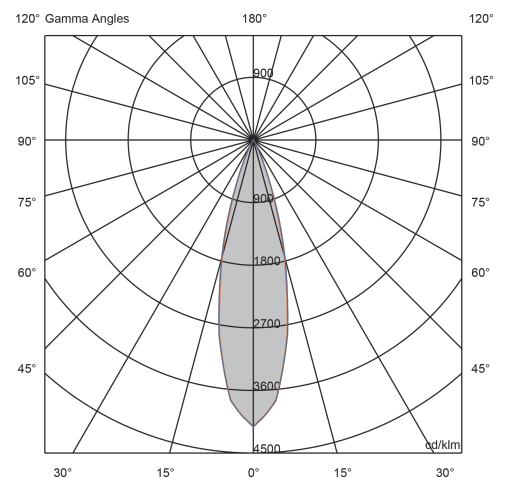


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

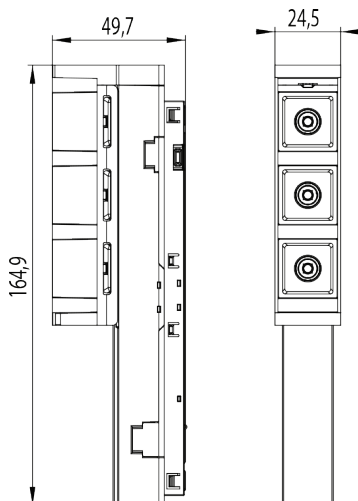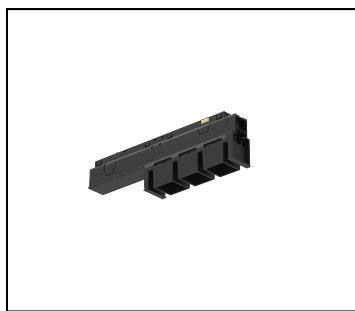

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 299.4

Nominal Flux(lm) 623.9

Real Power(W) 7.1

Efficiency(lm / W) 42.1

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	12.4
	UGR axial:	13.6

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

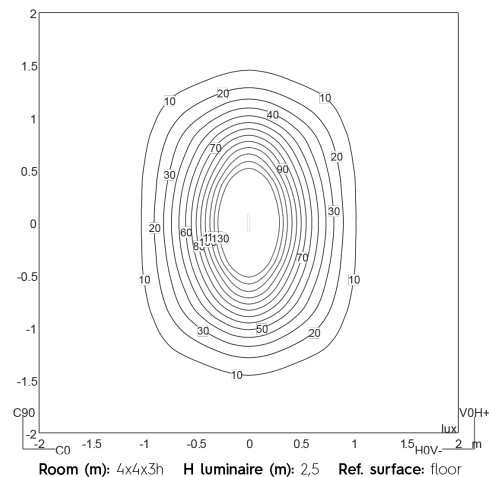
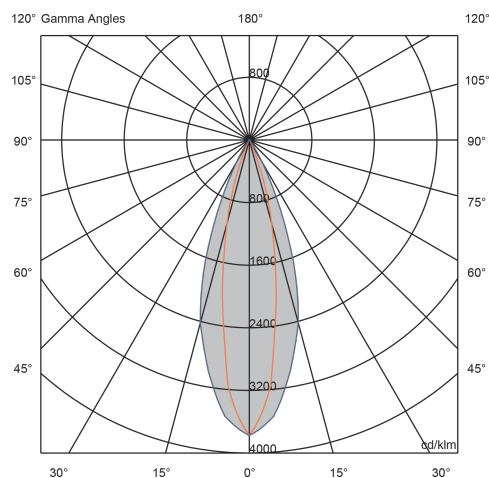


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

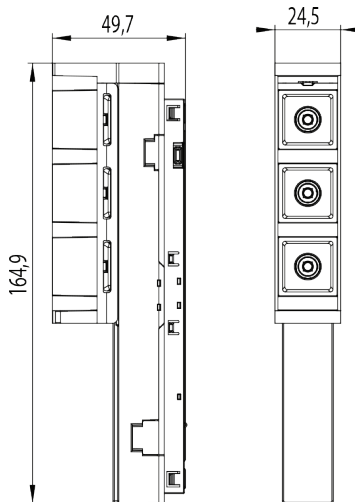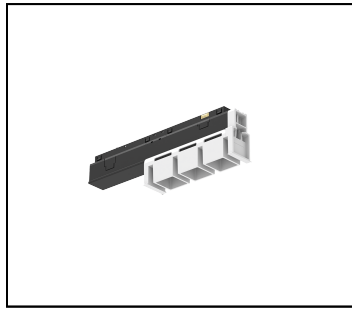

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 339.0

Nominal Flux(lm) 623.9

Real Power(W) 7.1

Efficiency(lm / W) 47.7

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.5
	UGR axial:	22.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

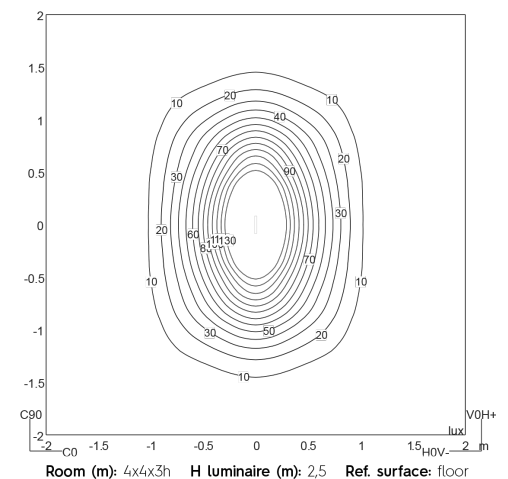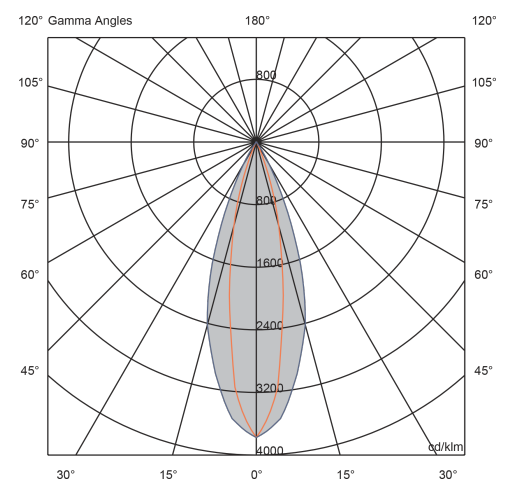


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

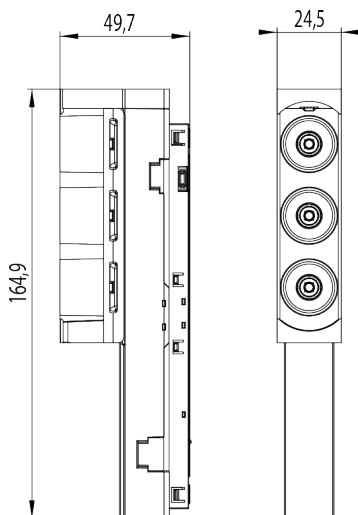

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 337.8

Nominal Flux(lm) 415.9

Real Power(W) 7.1

Efficiency(lm / W) 47.5

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	8.7
	UGR axial:	8.9

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

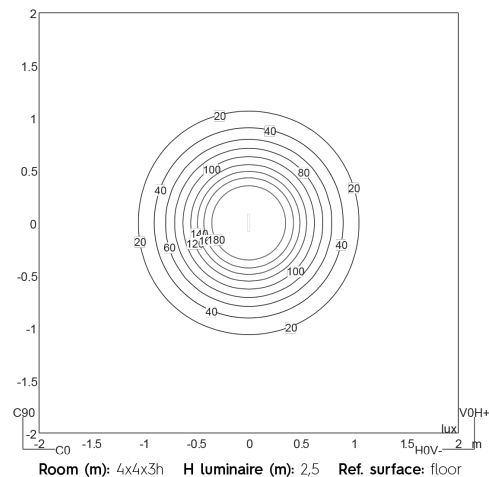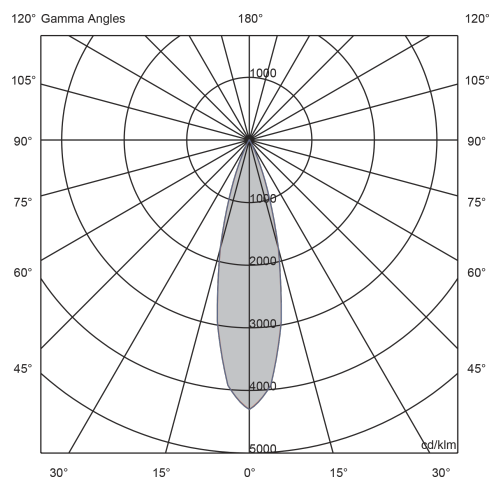

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

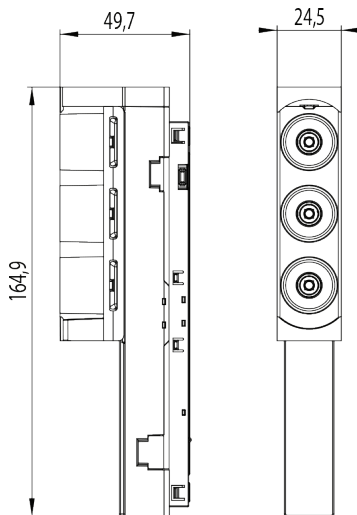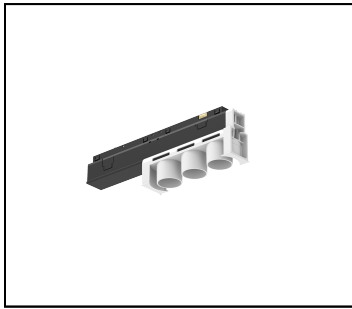

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W8-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 390.8

Nominal Flux(lm) 415.9

Real Power(W) 7.1

Efficiency(lm / W) 55.0

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.2
	UGR axial:	19.9

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

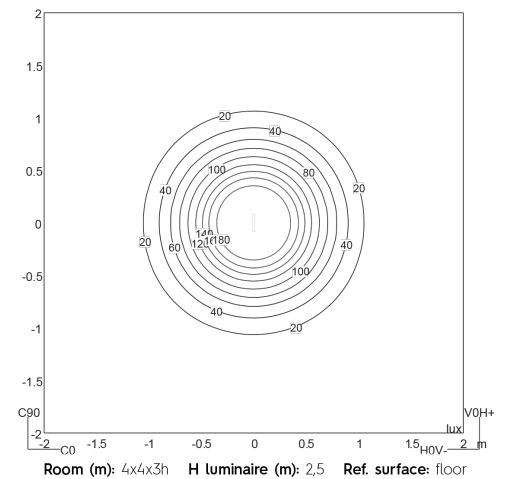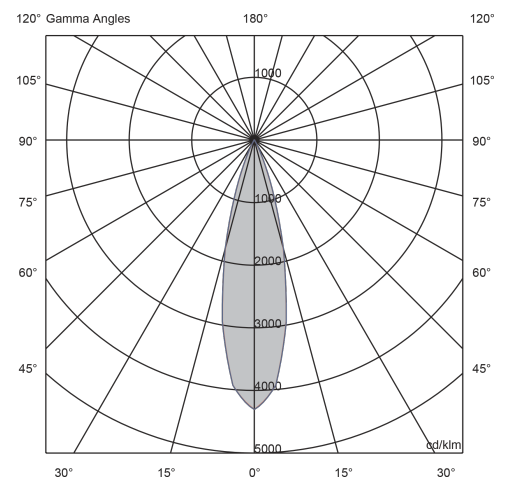


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

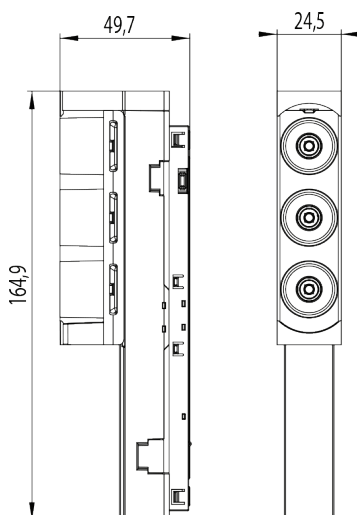

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 284.6

Nominal Flux(lm) 623.9

Real Power(W) 7.1

Efficiency(lm / W) 40.0

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.2
	UGR axial:	13.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

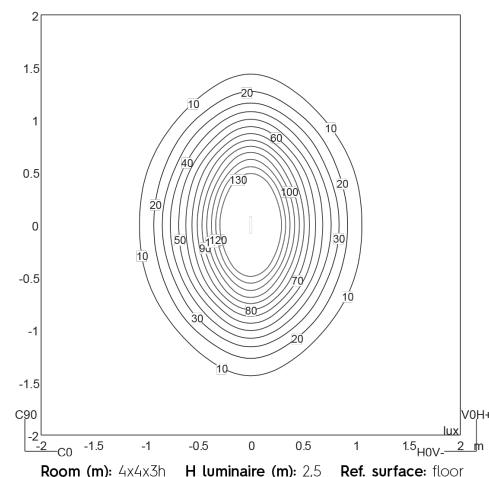
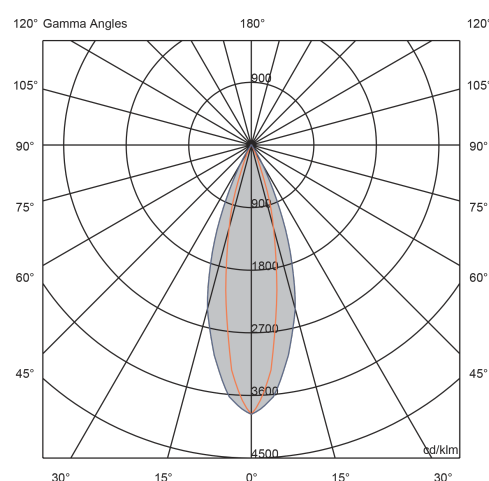


Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

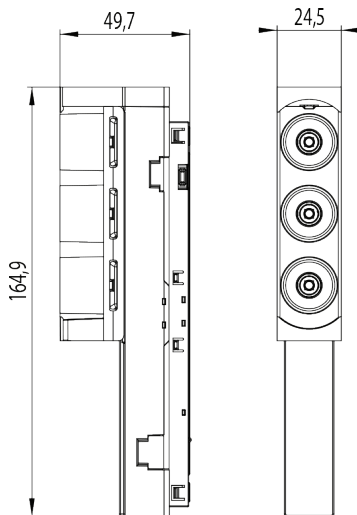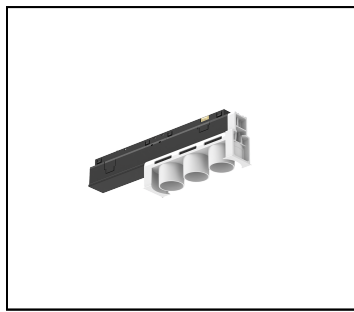

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 284.6

Nominal Flux(lm) 623.9

Real Power(W) 7.1

Efficiency(lm / W) 40.0

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.2
	UGR axial:	13.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

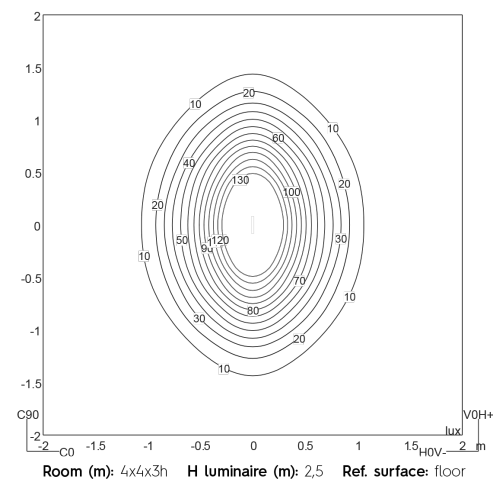
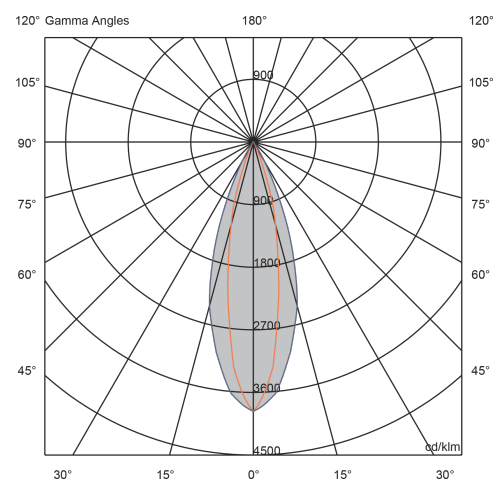


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

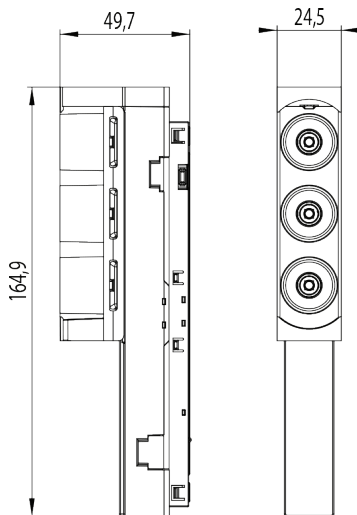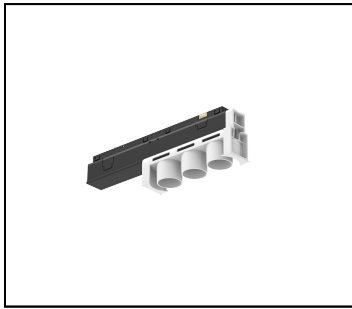

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W8-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 2700K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 2700K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 329.6

Nominal Flux(lm) 623.9

Real Power(W) 7.1

Efficiency(lm / W) 46.4

LED source LED

Colour Temperature(K) 2700

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.0
	UGR axial:	23.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

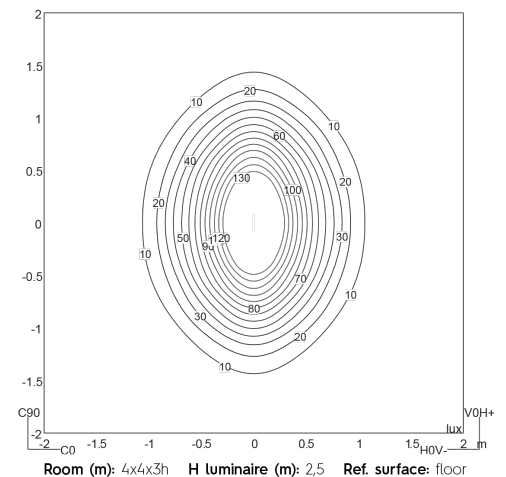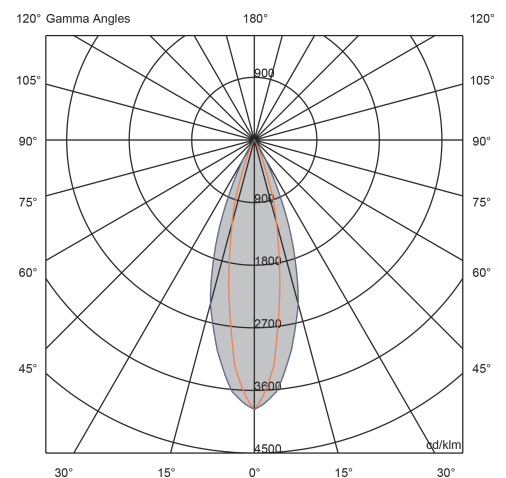

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

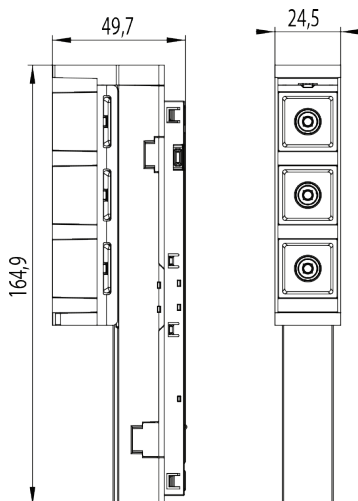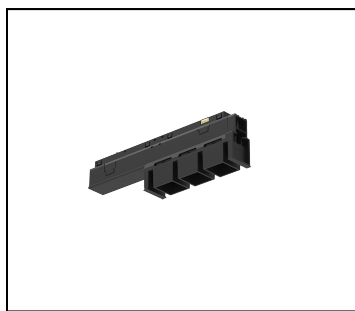

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigiare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 398.8

Nominal Flux(lm) 466.6

Real Power(W) 7.1

Efficiency(lm / W) 56.1

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	9.4
	UGR axial:	9.7

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

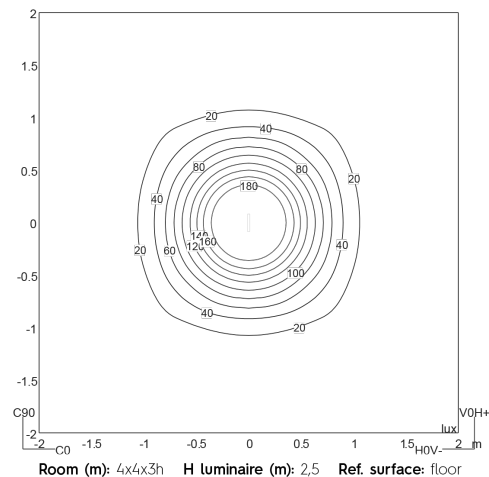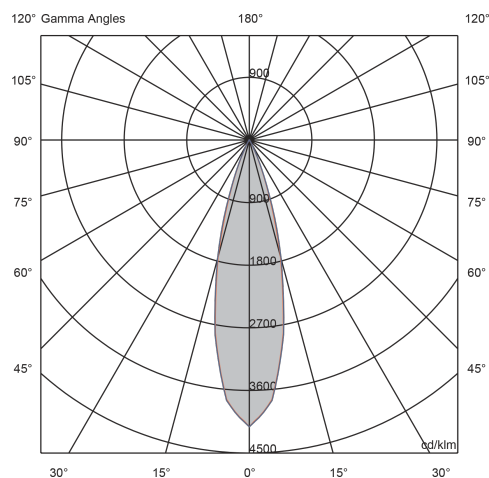

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

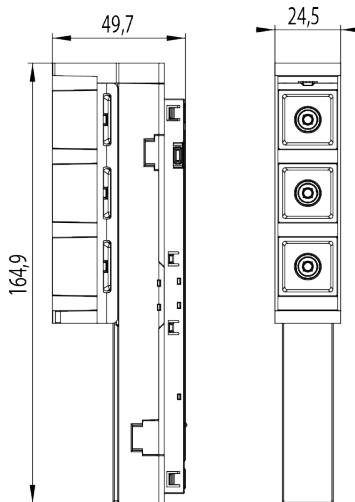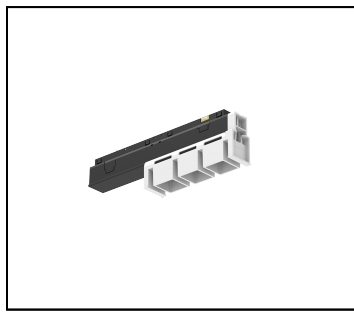

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 450.9

Nominal Flux(lm) 466.4

Real Power(W) 7.1

Efficiency(lm / W) 63.5

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	19.8
	UGR axial:	20.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

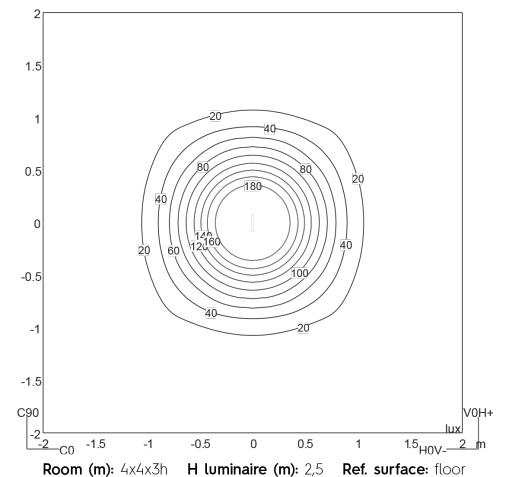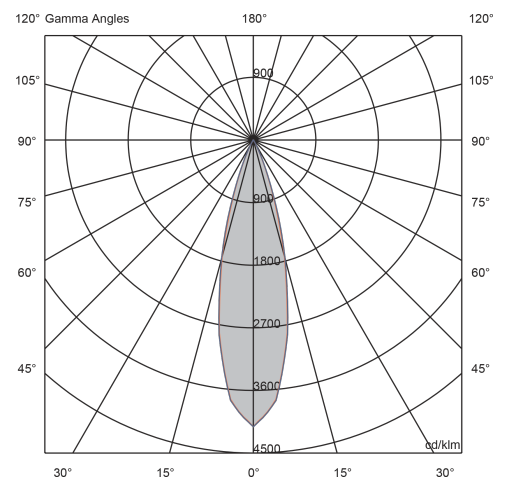

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

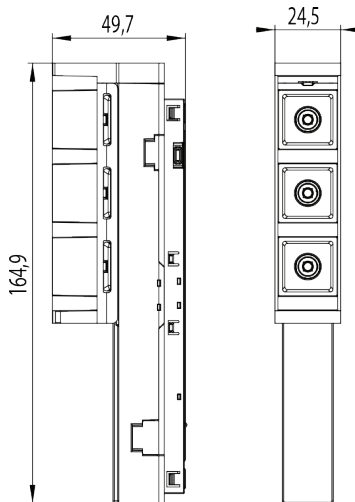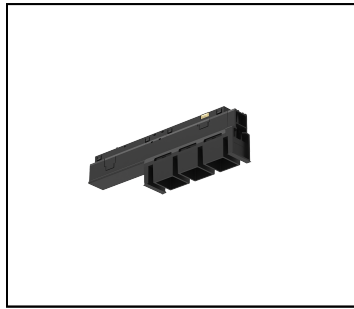

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/B6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 335.9

Nominal Flux(lm) 699.9

Real Power(W) 7.1

Efficiency(lm / W) 47.3

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	12.8
	UGR axial:	14.0

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

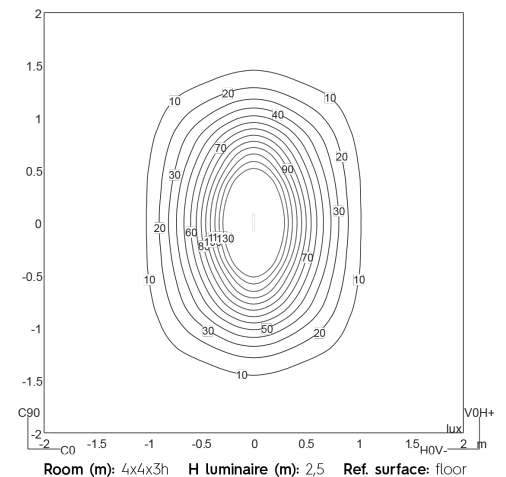
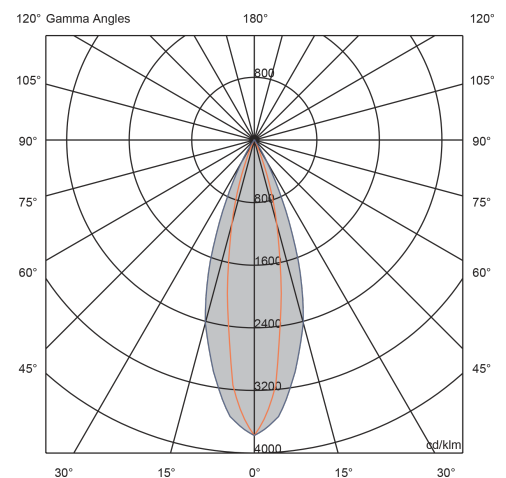


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

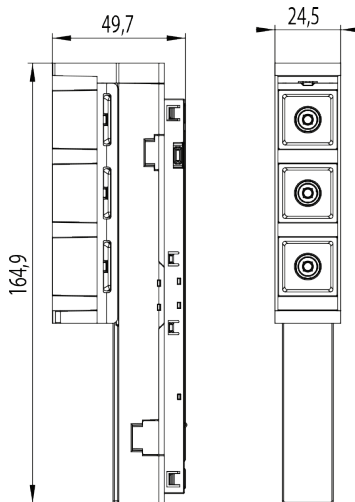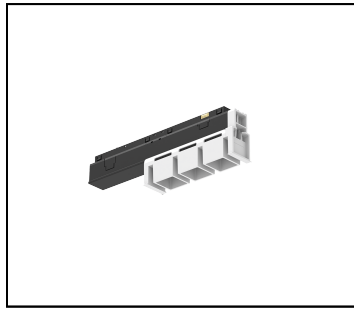

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ■ / SENZAFINE M22D DEEP LENS ■

CODICE PRODOTTO / PRODUCT CODE

M22DS3/W6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare quadrati, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three square antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 380.4

Nominal Flux(lm) 699.9

Real Power(W) 7.1

Efficiency(lm / W) 53.5

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	21.3
	UGR axial:	23.1

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.9

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

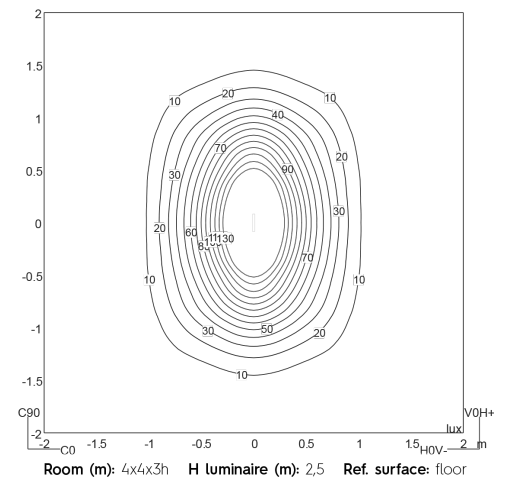
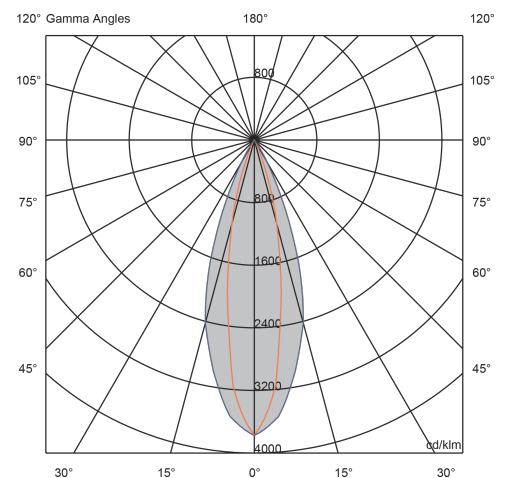


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

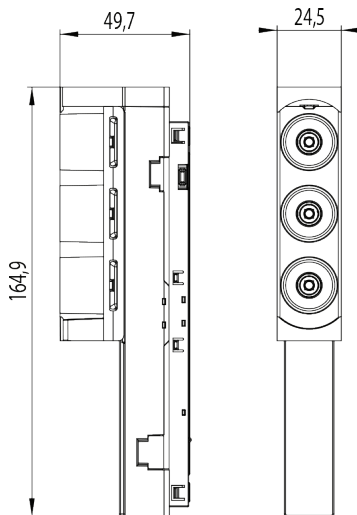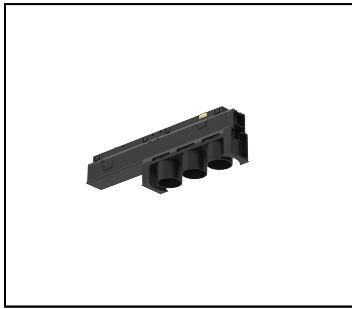

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antigrare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 337.8

Nominal Flux(lm) 415.9

Real Power(W) 7.1

Efficiency(lm / W) 47.5

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<13	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	8.7
	UGR axial:	8.9

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical



Packaging Tubo / Tube

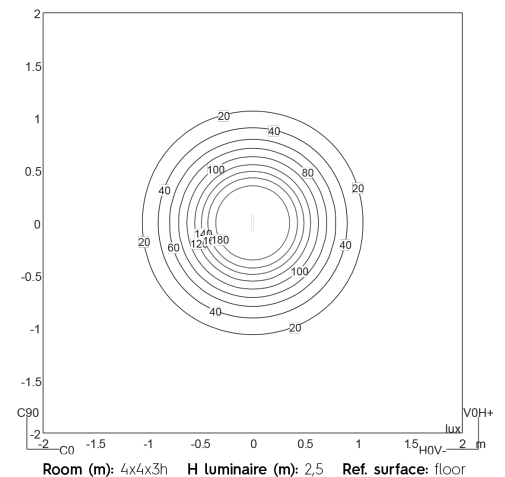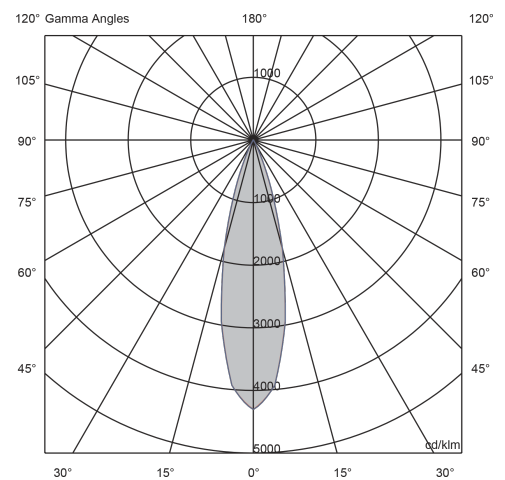

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

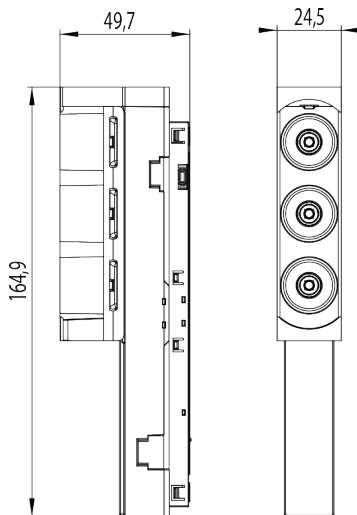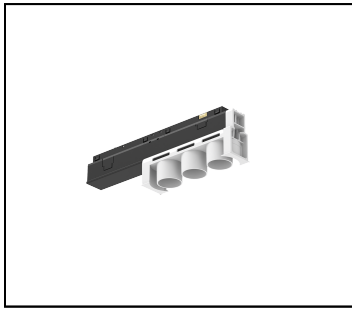

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W6-C-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti fascio medio in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate medium beam lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 438.5

Nominal Flux(lm) 466.6

Real Power(W) 7.1

Efficiency(lm / W) 61.7

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 26°

UGR

<22	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	20.6
	UGR axial:	20.3

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 26° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 26° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

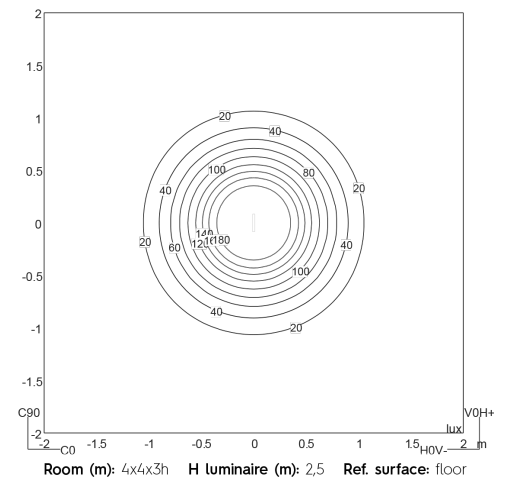
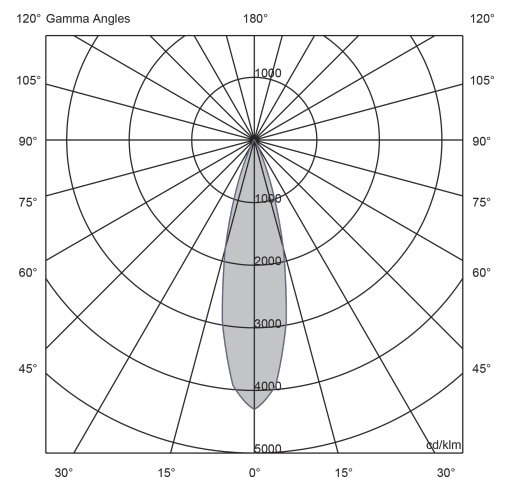


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

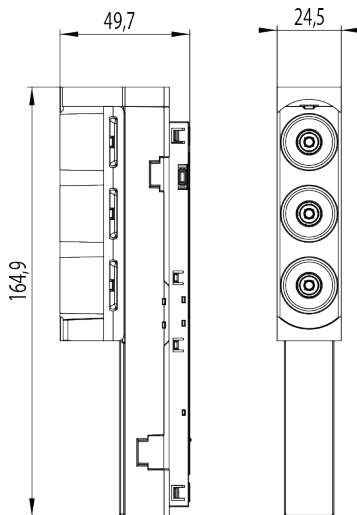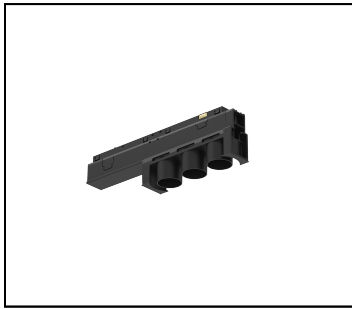

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/B6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 319.3

Nominal Flux(lm) 699.9

Real Power(W) 7.1

Efficiency(lm / W) 44.9

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<19	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	13.6
	UGR axial:	14.1

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Nero / Black

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

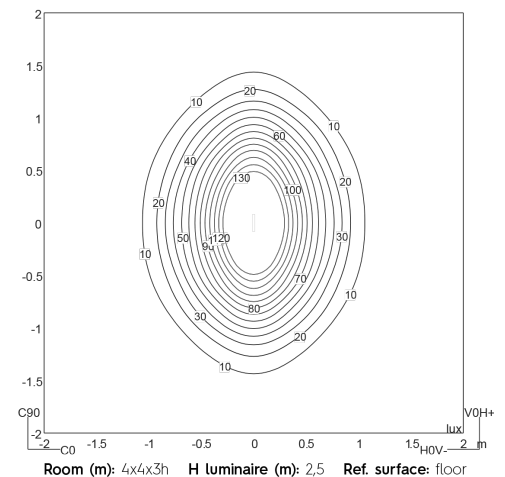
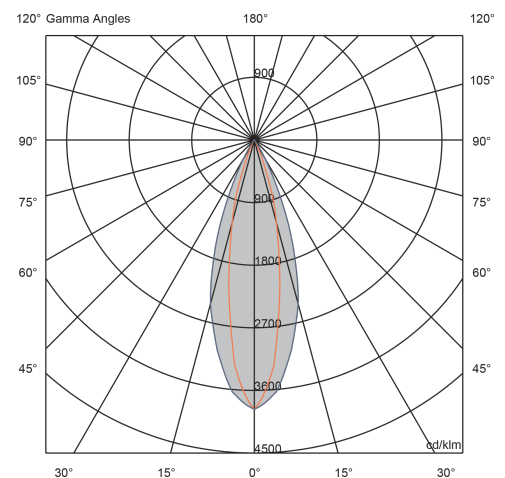


Room (m): 4x4x3m H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5

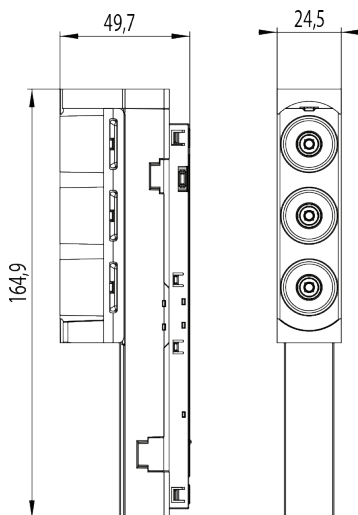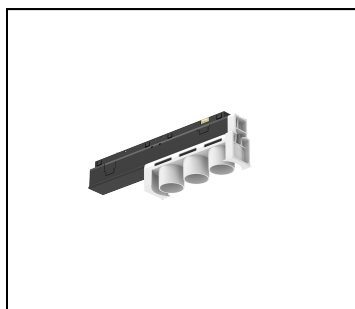

Certificazioni / Certifications



Info tecniche / Info tecniche



Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica.

Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia.

A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other color temperatures and CRI available on request. Values marked with an asterisk (*) are measurement values that refer to an ambient temperature of 25°C unless otherwise specified.

Over time, the luminous flux undergoes an inevitable decrease due to technology. A.A.G. Stucchi reserves the right to make technical changes without notice.

SENZAFINE M22D DEEP LENTI ● / SENZAFINE M22D DEEP LENS ●

CODICE PRODOTTO / PRODUCT CODE

M22DR3/W6-F-2-C

DESCRIZIONE / DESCRIPTION

Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600C CORE11. Tre antiglare tondi, lenti ellittiche in policarbonato. L(mm): 164,9. 4000K. CRI≥90: LED.

48V linear light module. Mechanical fixing. For 9600C CORE11 tracks. Three round antiglare, polycarbonate elliptical lens. L(mm): 164,9. 4000K. CRI≥90: LED.

DATI TECNICI / TECHNICAL DATA

Application ON TRACK

Real Flux(lm) 369.8

Nominal Flux(lm) 699.9

Real Power(W) 7.1

Efficiency(lm / W) 52.0

LED source LED

Colour Temperature(K) 4000

CRI 90

MacAdam ≤ 3

Beam Angle 21°x37°

UGR

<25	X=4H Y=8H	S=0.25H
	Reflection factors:	70/50/20
	UGR transversal:	22.4
	UGR axial:	23.4

Lifetime(Khr) >60Khr L90B10

Driver DALI SELV

VF ~ 9

I LED(mA) 640

L(mm) 165



Weight(g) 71.1

Materials Corpo in poliammide e policarbonato + lente 21°x37° in PMMA + cover antiglare in policarbonato
Polyamide and polycarbonate body + PMMA 21°x37° lens + polycarbonate antiglare cover

Colour Bianco / White

Mounting Meccanico / Mechanical

Packaging Tubo / Tube

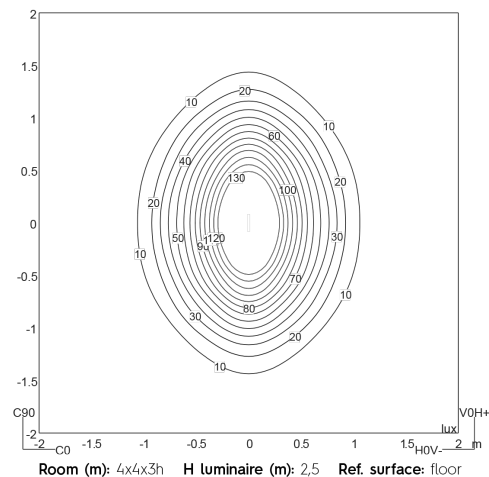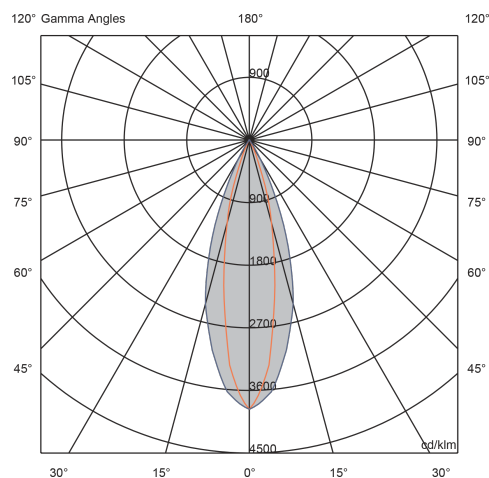

Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Note / Notes

Utilizzabile con CORE11+Cover M2 e CORE11+Cover M5

Suitable with CORE11+Cover M2 and CORE11+Cover M5