

2020

HYPER

S Y S T E M



OFFICE

Suspension track: HYPER STYLE
• M42 LINEAR LIGHT LENS
• UP23 LINEAR LIGHT

Ceiling track: HYPER SHAPE
• M42 LINEAR LIGHT LENS

HYPER SYSTEM 2.0

MAIN VOLTAGE REDEFINED

The new HYPER SYSTEM 2.0 redefines the use and potential of main voltage track systems. The tracks are characterized by the presence of UPPER & LOWER sectors, where the upper enables the use of emergency lighting, speakers and customized solutions, while the lower sector guarantees all the smart functionalities of a three-phase track + DATABUS. Tracks are combined with three different co-extrusions, which enable the sector to be either non-powered, low-voltage powered, or main-voltage powered. A full range of light modules developed specifically to fit the needs of this system functionally and aesthetically are available. Full customization of tracks and light modules is also possible.

HYPER SOUL

Technical look

A system where track and linear lighting incorporate the technical features of HYPER 2.0. Ideal for functional spaces where clean lines and essential design take priority.

HYPER SHAPE

Architectural look


A system with “one-piece” tracks in a range of standard or custom shapes and flush lighting. Perfect for architectural settings where aesthetics and seamless integration are key. Available in white or black.

HYPER STYLE


Aesthetic look

A system featuring customizable “built-up” tracks tailored in shape and colour to offer maximum creative freedom, enhanced by flush lighting, wherever design expression matters most.

*UPLIGHT

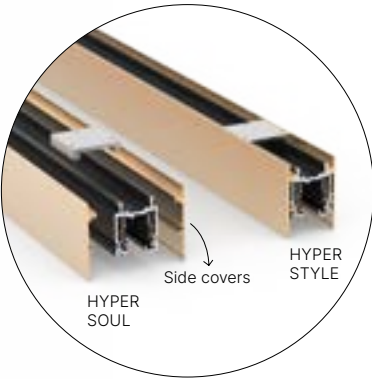

TRACKS

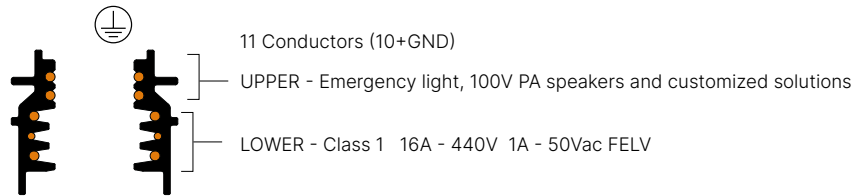

	HYPER SOUL	HYPER SHAPE		HYPER STYLE
 Class III 10A/60Vdc SELV				
 Double insulated Class I 10A/250V				
 No conductors				
230V Spotlights	Sensor	Up&Down light	Emergency light	100V PA speakers

The following accessories are available:

- L, T and X joints, plus a complete range of suspension and ceiling-mount kits.
- RADIAL joint with up to 6 branches.
- CROSS version: a track with two adapters, designed to connect two tracks crosswise.
- Native compatibility with all ONETRACK system adapters.

LIGHT ENGINE

THE TECHNOLOGICAL, DESIGN AND CIRCULAR HEART OF THE SYSTEM

LIGHT ENGINE is a true technology engine, developed with a modular and circular approach that allows individual functional components (LED board, driver, optics and mechanical parts) to be replaced without having to substitute the entire luminaire.

The module-to-track coupling system, the position of the power conductors, the HYPER KEY concept, and the mechanical and electrical architecture make LIGHT ENGINE a multi-platform solution, enabling a consistent lighting language and uniform technical performance for both UP and DOWN light across the different A.A.G. Stucchi systems.



RENEWING VALUE

Separate and interchangeable elements allow to replace only damaged parts.



PRESERVING VALUE

Possible to update individual components.



RECYCLE EFFORTLESSLY

Separate elements make proper waste disposal easy.




EASY AND QUICK UPKEEP

Replacement of components is simple and immediate.



MULTI-PLATFORM

Uniform design and technical performance.

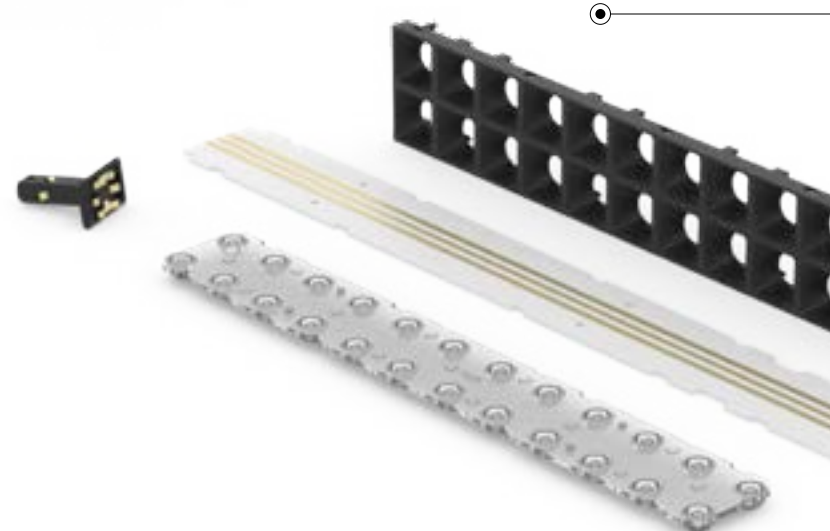

MULTI-PLATFORM

LIGHT ENGINE INSIDE HYPER 2.0

(SOUL, SHAPE, STYLE)

LIGHT ENGINE INSIDE STANDALONE PROFILE

LIGHT ENGINE INSIDE ONETRACK

(ST, ADVANCE, E-TRACK)

LIGHT ENGINE INSIDE ONETRACK

(GRIP)



FULL CUSTOMIZATION

HYPER 2.0 system is also designed to be the base for a fully custom design concept. In HYPER SHAPE and HYPER STYLE versions, both the track and the LIGHT ENGINE can be customized while keeping the mechanical and electrical infrastructure unchanged.





CUSTOM SIZE


CUSTOM SIZE



CUSTOM SHAPE

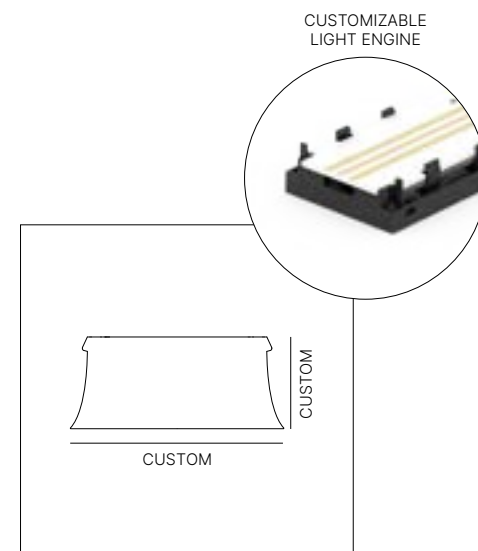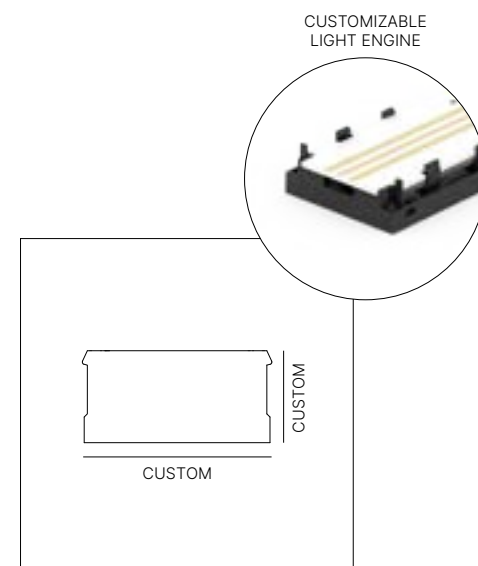


ADVANTAGES



DESIGN PHASE

Freedom without complexity

- Aesthetic freedom of the track and the light
- Visual customization (cover, shape, finish)
- Consistency of the lighting language across spaces and applications
- A clean system that simplifies the design process



ENGINEERING PHASE

One platform, controlled complexity

- A single validated and certified technology platform
- Customizable light engine and track built on a common base
- Decoupled architecture between structure, technology, and aesthetics, reducing stock levels
- A technology partnership that reduces risk and accelerates time-to-market



INSTALLATION PHASE

Simplicity on site

- A modular, intuitive system
- Fast and easy assembly
- Repositionable lighting even after installation
- Fewer variants, less operational complexity



LIFECYCLE PHASE

Products that evolve

- A modular architecture that is repairable and upgradeable
- Replacement of individual components
- Light-engine use across platforms
- Extended service life and reduced waste

EMERGENCY AND SMART DEVICES


HYPER 2.0 tracks UPPER sector is an added value of the system.
The four conductors can be used for emergency lighting, such as din and Tridonic systems, 100V PA speakers, or other customized solutions.

The DATABUS in the LOWER sector enables the integration of smart devices as sensors or light control through the use of specific cases. For example the one designed to host Zhaga Book20 sensors or the Casambi Salvador Series 1000.

Tridonic, din and Casambi are leaders in the development and production of lighting and control systems. We are proud of our collaboration, which has resulted in a range of emergency exit signs and safety luminaires with A.A.G Stucchi adapters available in the din and Tridonic catalogues, as well as special cases designed for integration with Casambi.

For more details, please visit:



tridonic.com
din-notlicht.com
casambi.com

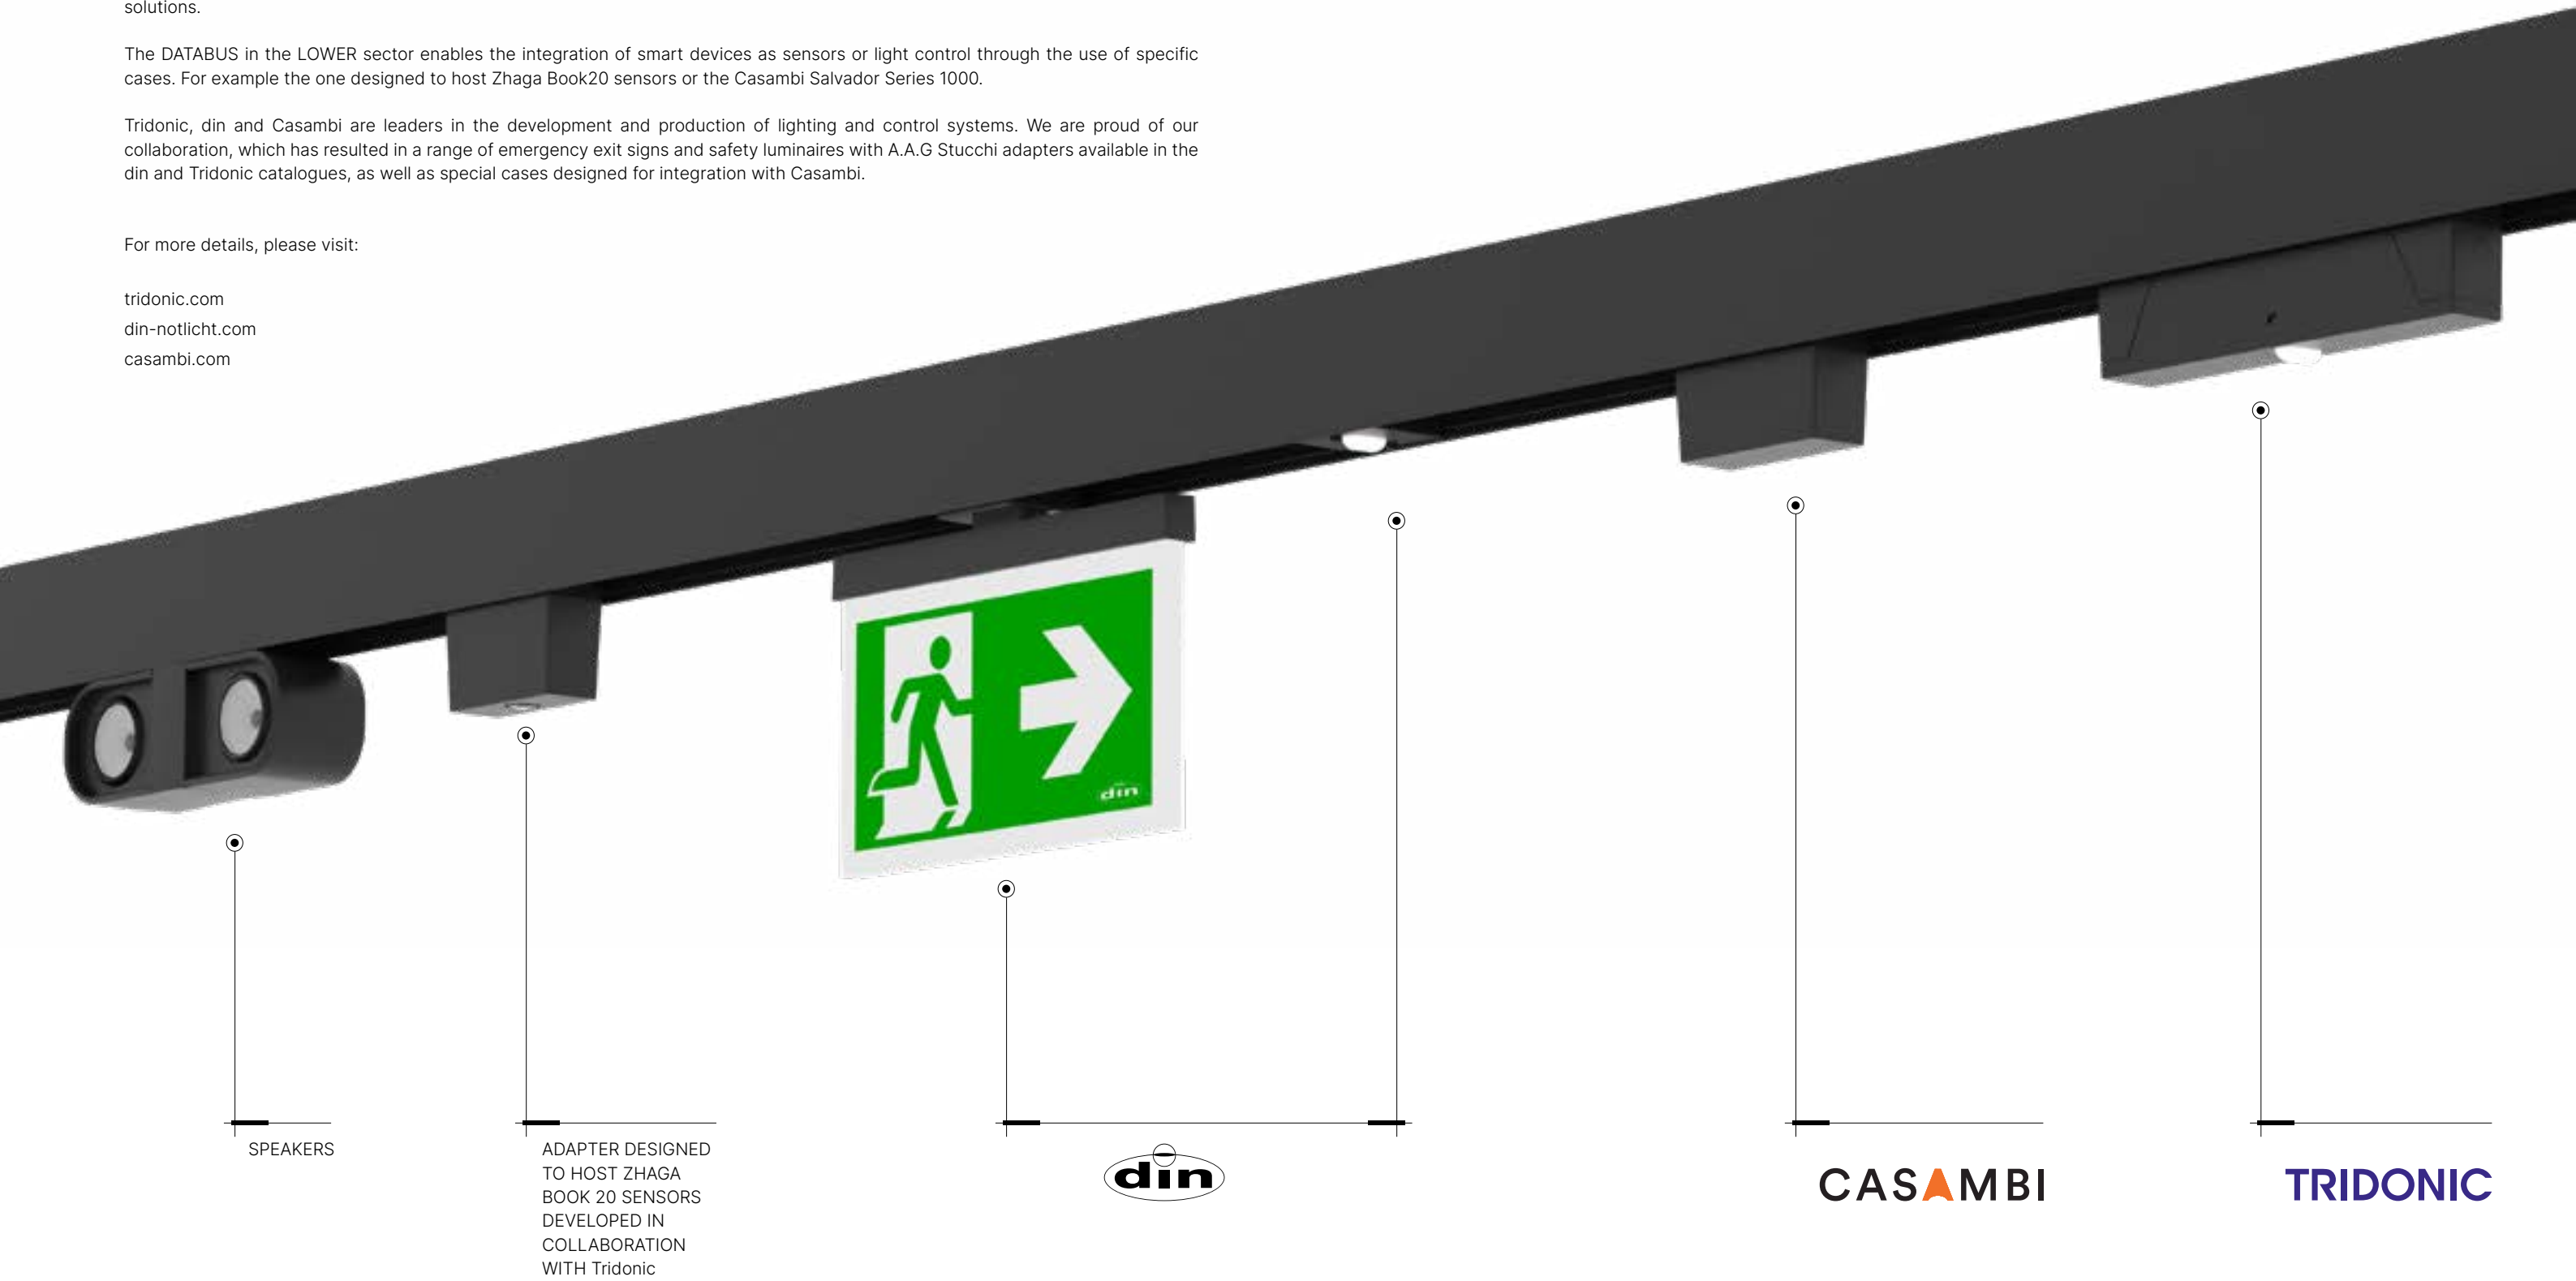

LIGHT INSIDE HYPER 2.0



LINEAR LIGHT M42

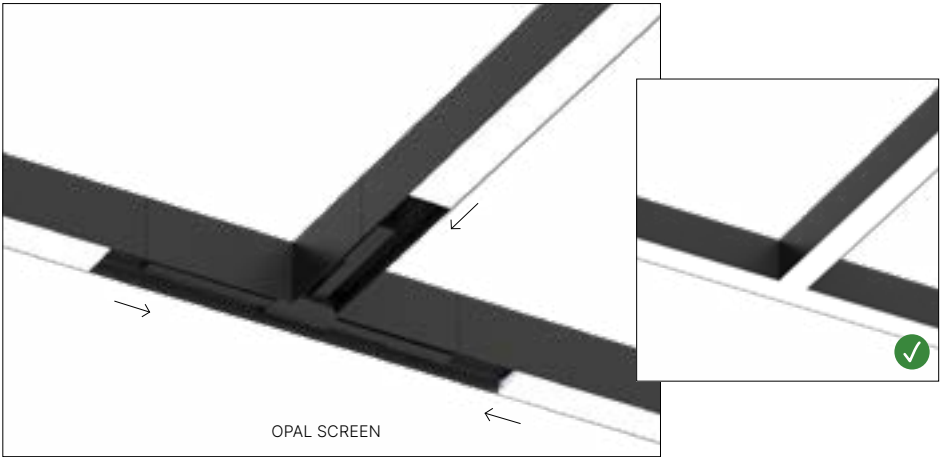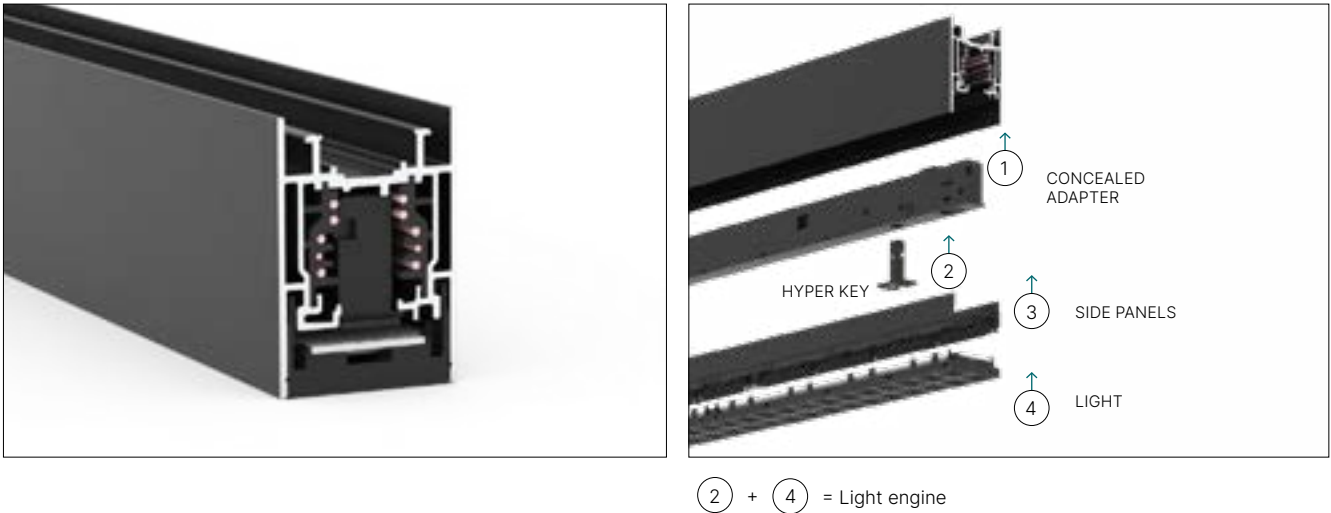

The system is characterized by an interconnection element that allows the modules to slide in the track while keeping the adapter fixed, making it possible to achieve the continuous light effect even at the electrical joints.

M42





OPTICS:
Opal / Microprismatic / Lens (32° or 68°)

CCT:
2700K / 3000K / 4000K / 4000K CRI80

CRI:
≥90



Colours:
Black embossed / White embossed / Metallic

LINEAR LIGHT COMPOSITION


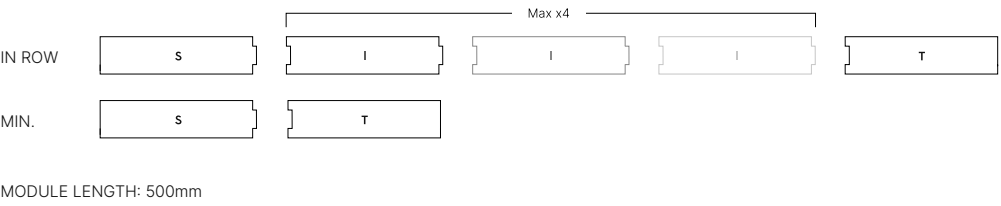


The installation of the modules in a continuous row and in the track is simple and intuitive, without the use of additional tools.

LINEAR LIGHT UP23

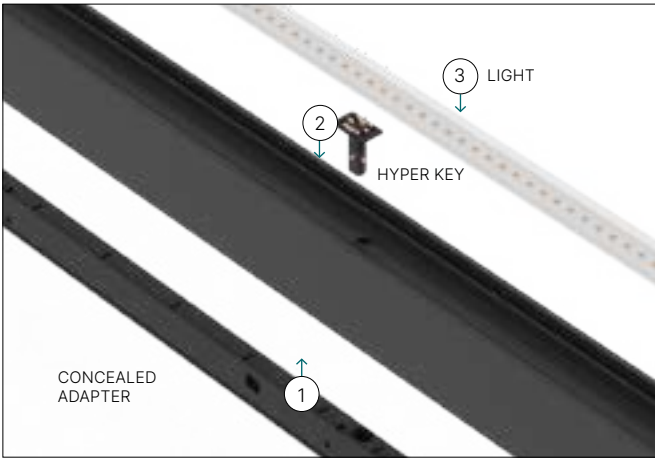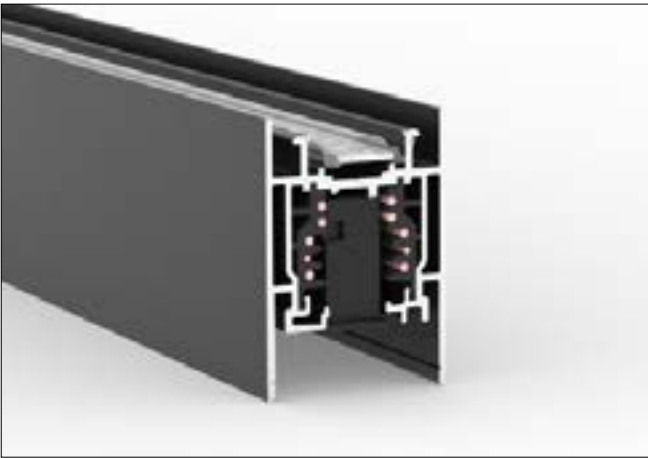

② + ③ = Light engine

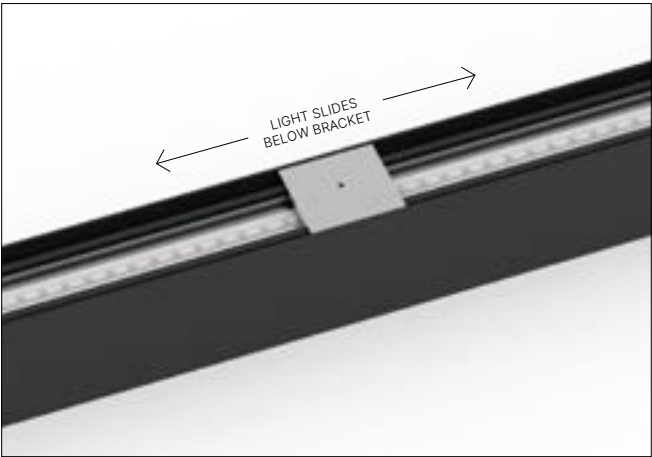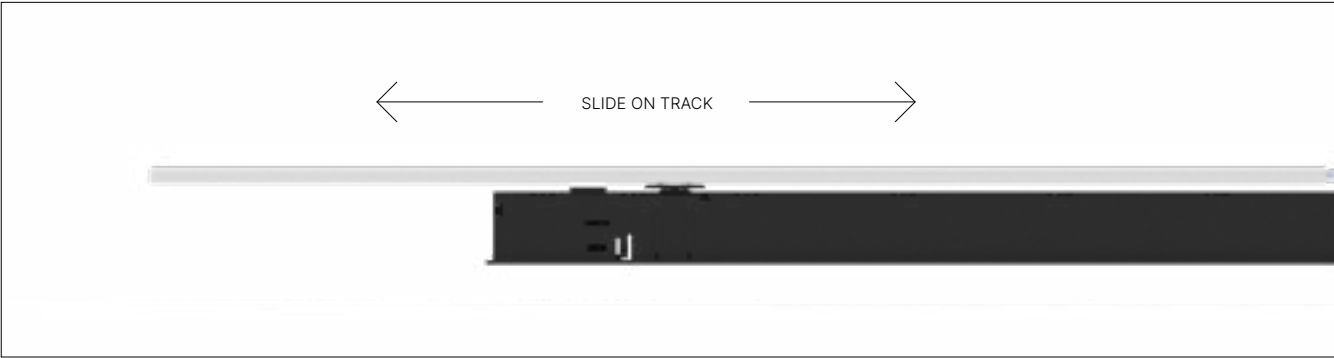

UP23




OPTICS:
Lens 147°

CCT:
2700K / 3000K / 4000K / 4000K CRI80

CRI:
≥90

LINEAR LIGHT COMPOSITION

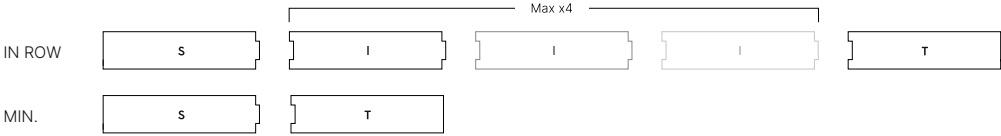

MODULE LENGTH: 500mm



The installation of the modules in a continuous row and in the track is simple and intuitive, without the use of additional tools.

CLIC

The adjustable F41 projector, with Ø41 mm, offers 355° rotation and up to 155° inclination, allowing its use in the track both from above and below in double emission tracks.

The heart of the design is the multifunction button that unlocks the arm for rotation beyond 90°, ensuring smooth and repeatable movement while guaranteeing a compact and harmonious aesthetic form; all in one CLIC.

F41

EASY SWITCH IN A CLIC



Ø41mm

OPTICS:

Lens 18° / 24° / 36°

CCT:


2700K / 3000K / 4000K

CRI:

≥90

Colours:

Black embossed / White embossed

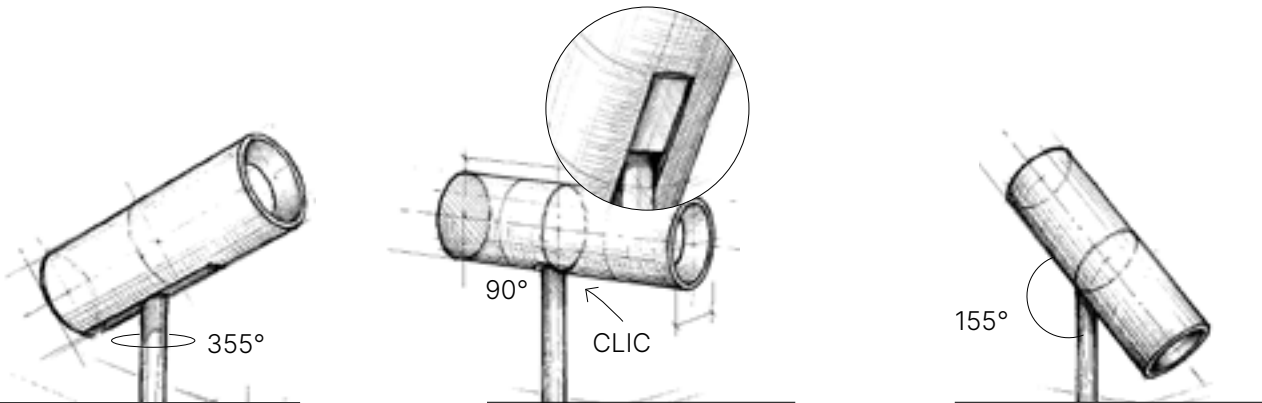


The recessed optical group ensures high visual comfort in addition to interchangeable antiglare accessories cross or honeycomb.





FUNCTIONALITIES

The CLIC range is the family for accent lighting with an essential design and high-level lighting performance. CLIC maintains the same lighting quality, elegantly adapting to every design need, from the precision of the spot to the versatility of the pendant to the perfect integration with downlight tracks.


Thanks to the possibility of exchanging adapters, CLIC ensures optimal aesthetics in all track versions.

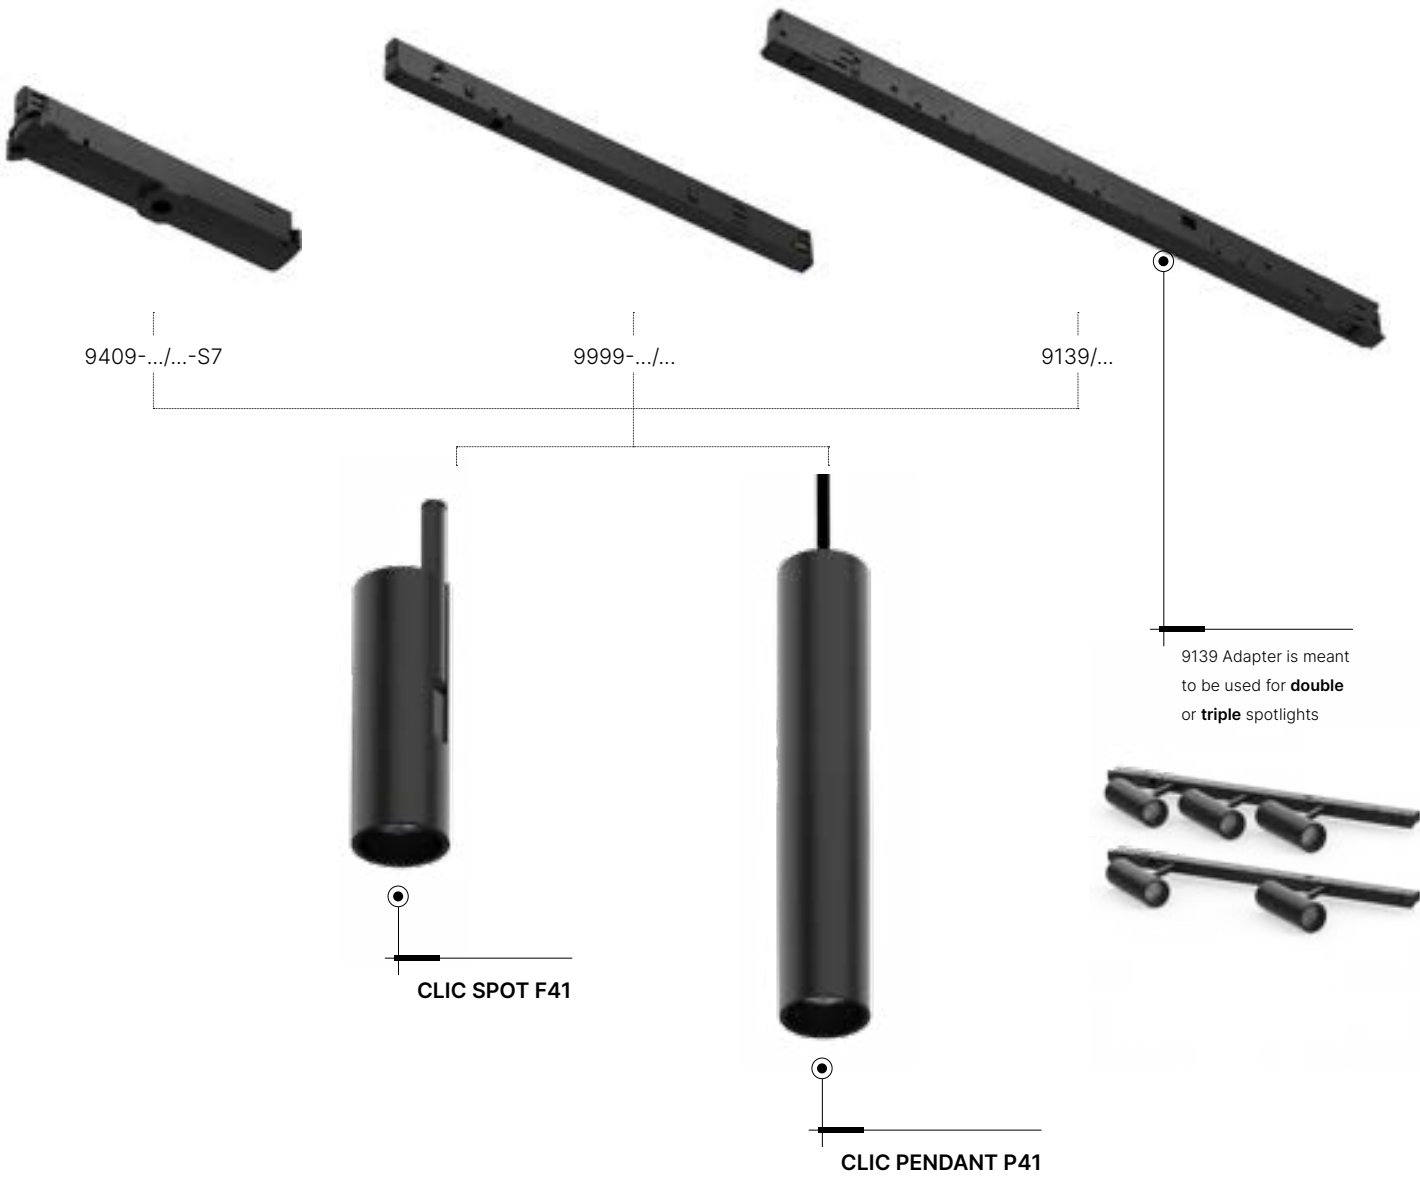


LIGHT ENGINE IN STANDALONE

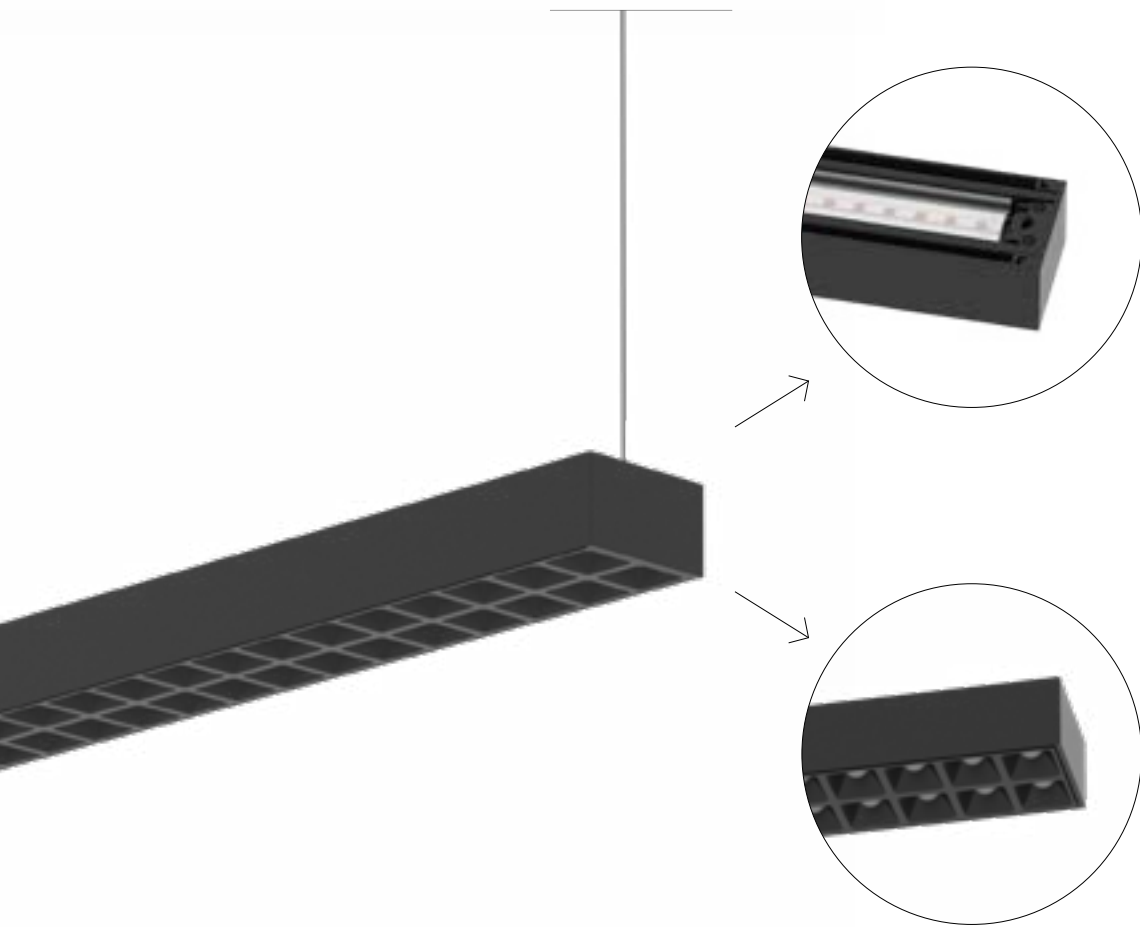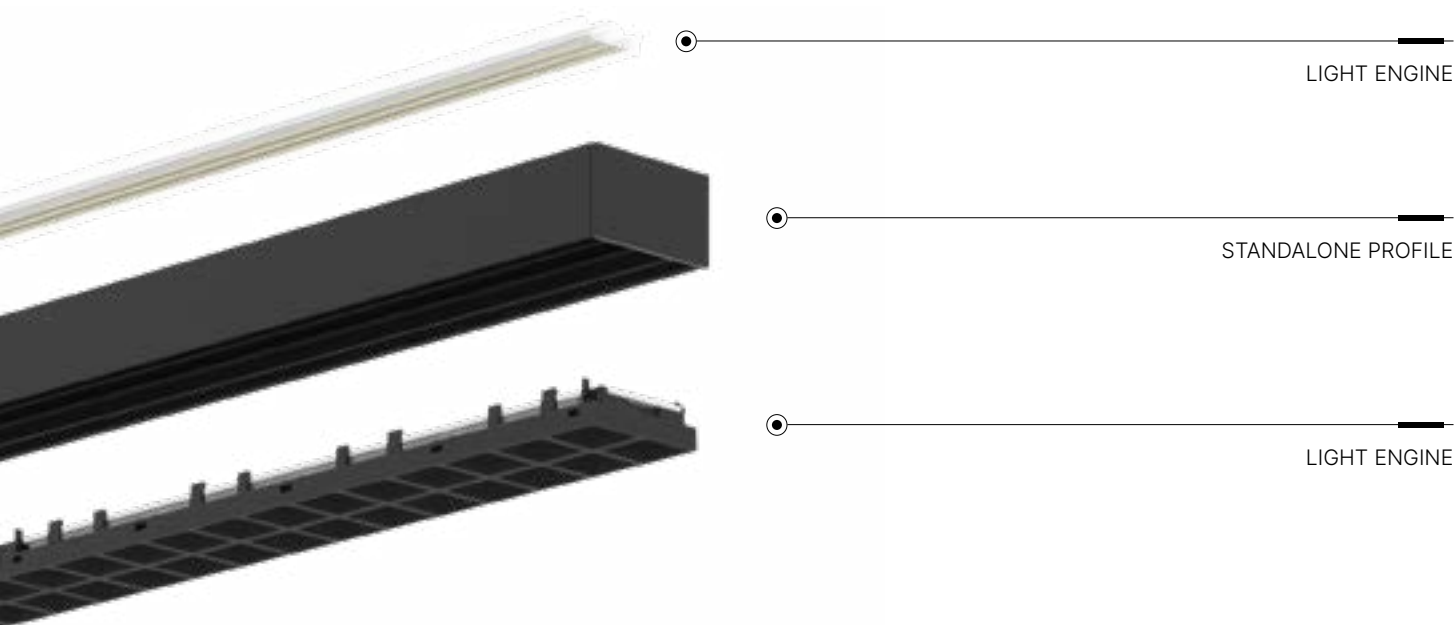


MOUNTING OPTIONS



LIGHT ENGINE IN ONETRACK

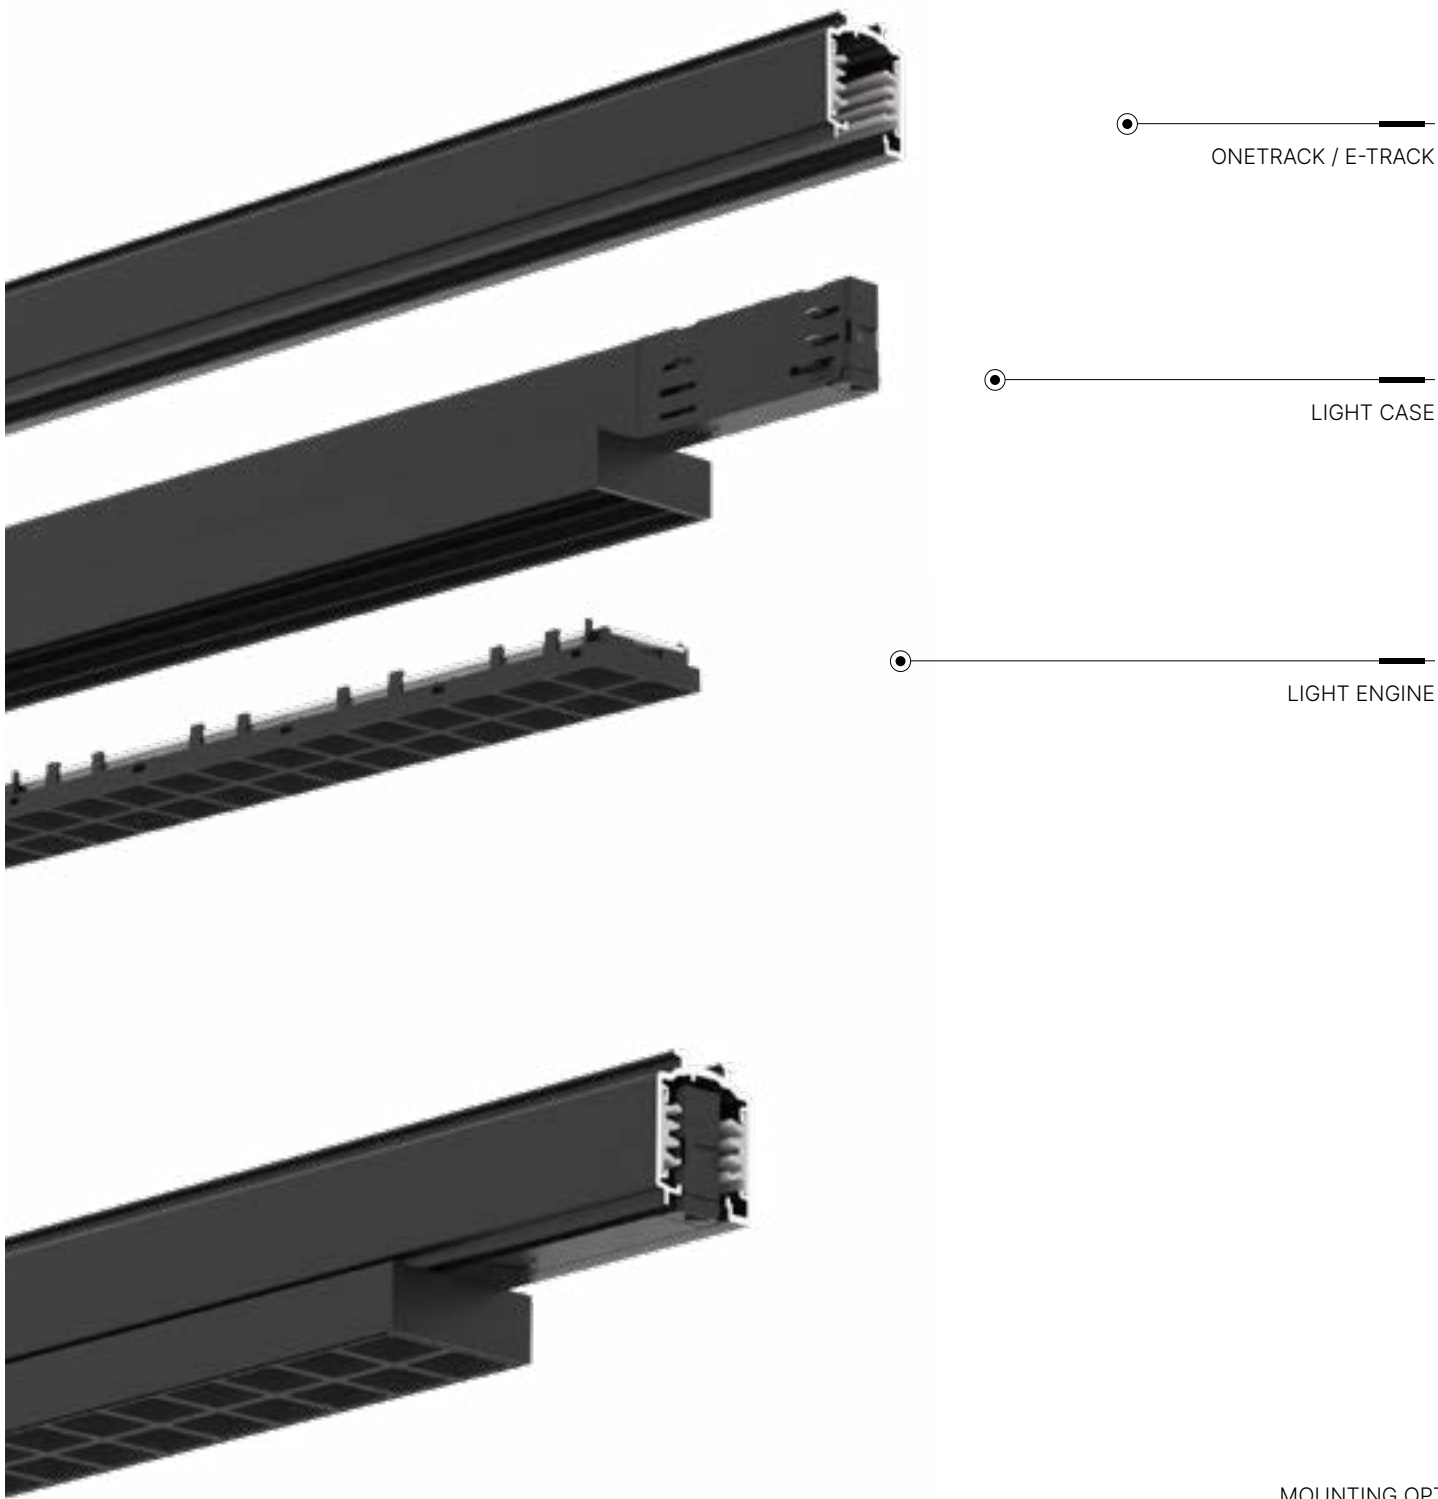

MOUNTING OPTIONS





OPEN SPACE

- Suspension track: HYPER SOUL
- M42 LINEAR LIGHT OPAL
 - CLIC SPOT F41T
 - CLIC PENDANT P41
 - CROSS TRACK
 - RADIAL JOINT

A.A.G. Stucchi s.r.l. u.s.

Via IV Novembre 30/32, Olginate (LC)

23854 - Italy

aagstucchi.it

info@aagstucchi.it